

# DOYLE NAM RESIDENCE

129 STATE STREET, PORTSMOUTH, NH


HISTORIC DISTRICT COMMISSION - 08.05.2026

Spivak Architects

CONTENTS


PAGE

|                               |    |
|-------------------------------|----|
| PROPOSED MODIFICATIONS        | 3  |
| DETAILS                       | 16 |
| MATERIALS AND SPECIFICATIONS  | 24 |
| 5/4/2022 HDC APPROVED PACKAGE | 31 |

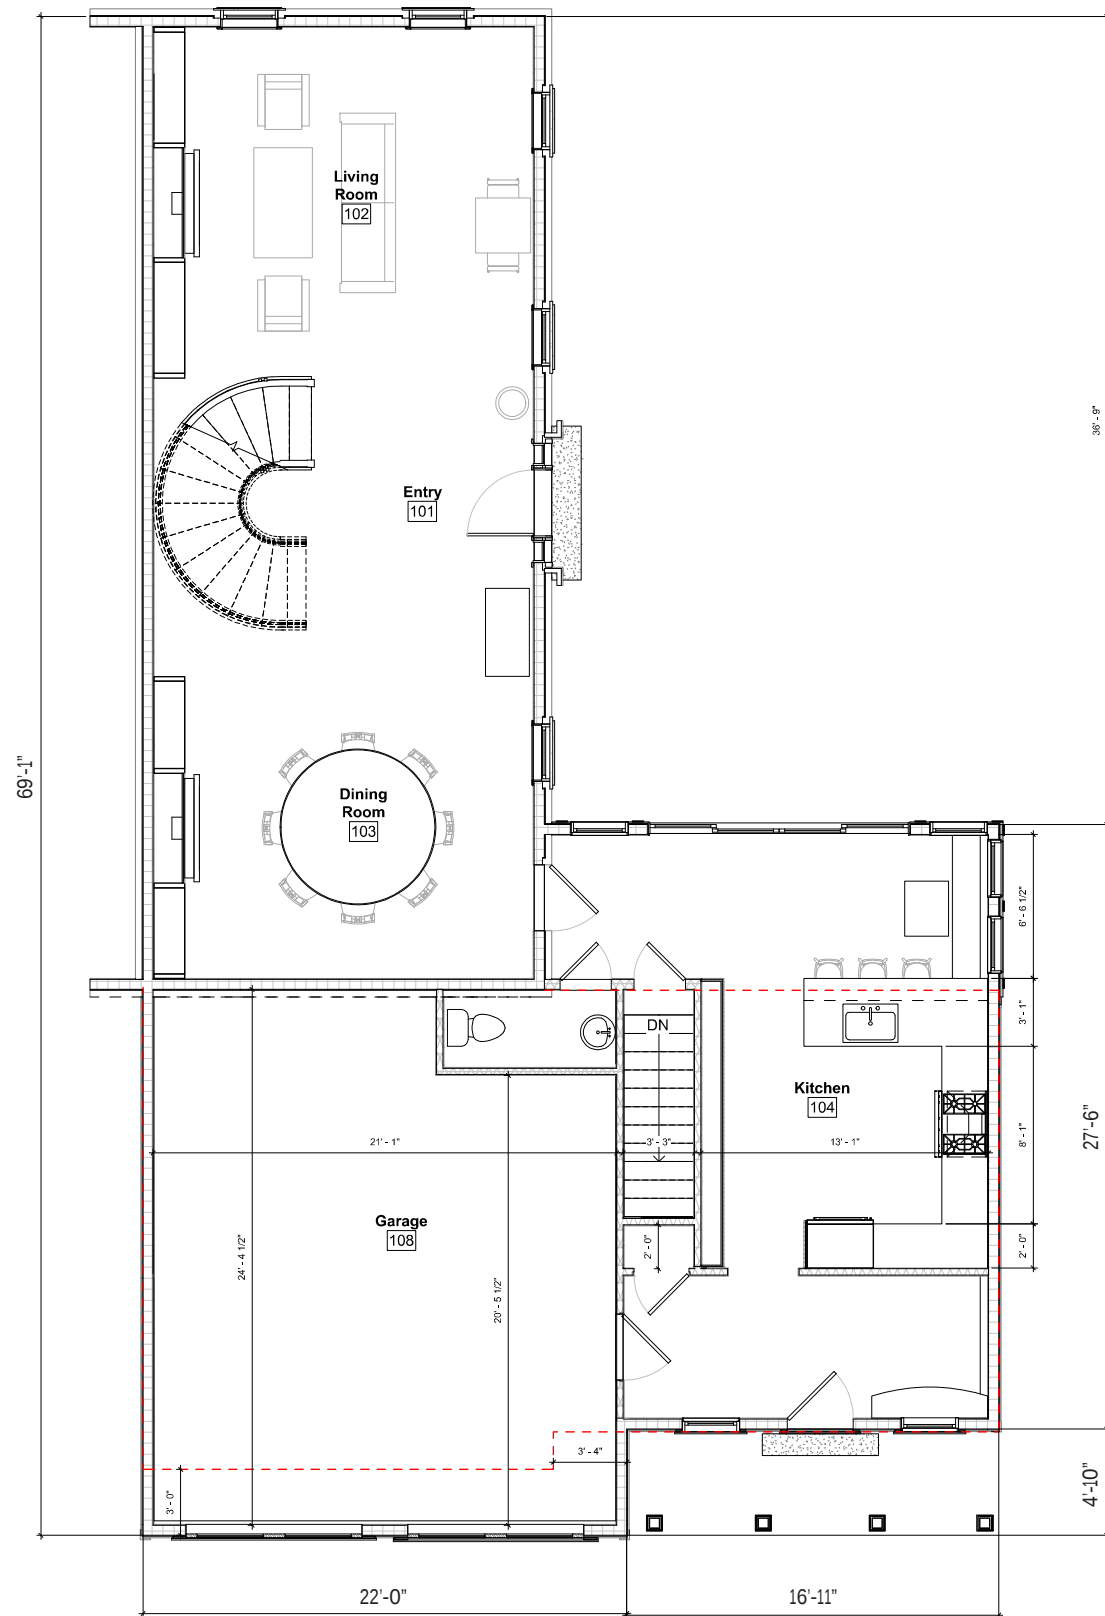

HDC APPROVED 05/04/2022

## BUILDING FOOTPRINT

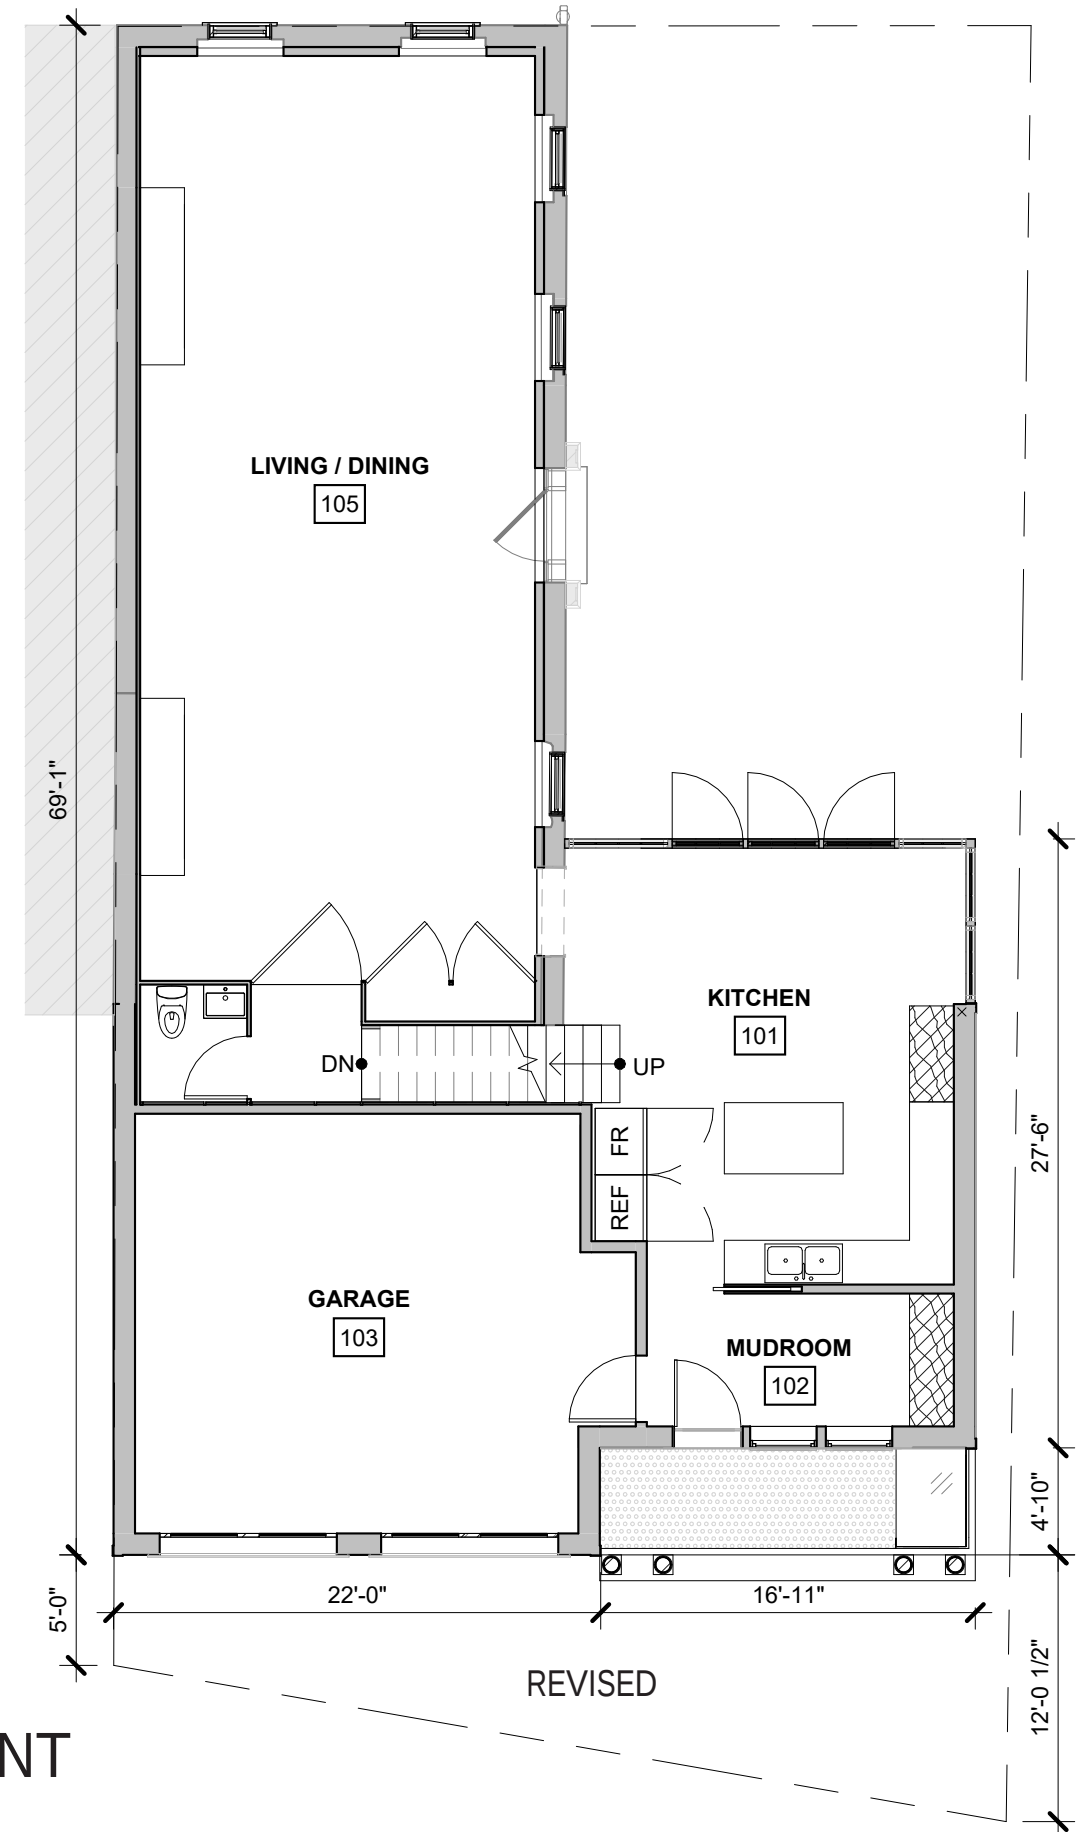



HDC APPROVED 05/04/2022




REVISED

## BUILDING HEIGHT




HDC APPROVED 05/04/2022

REVISED

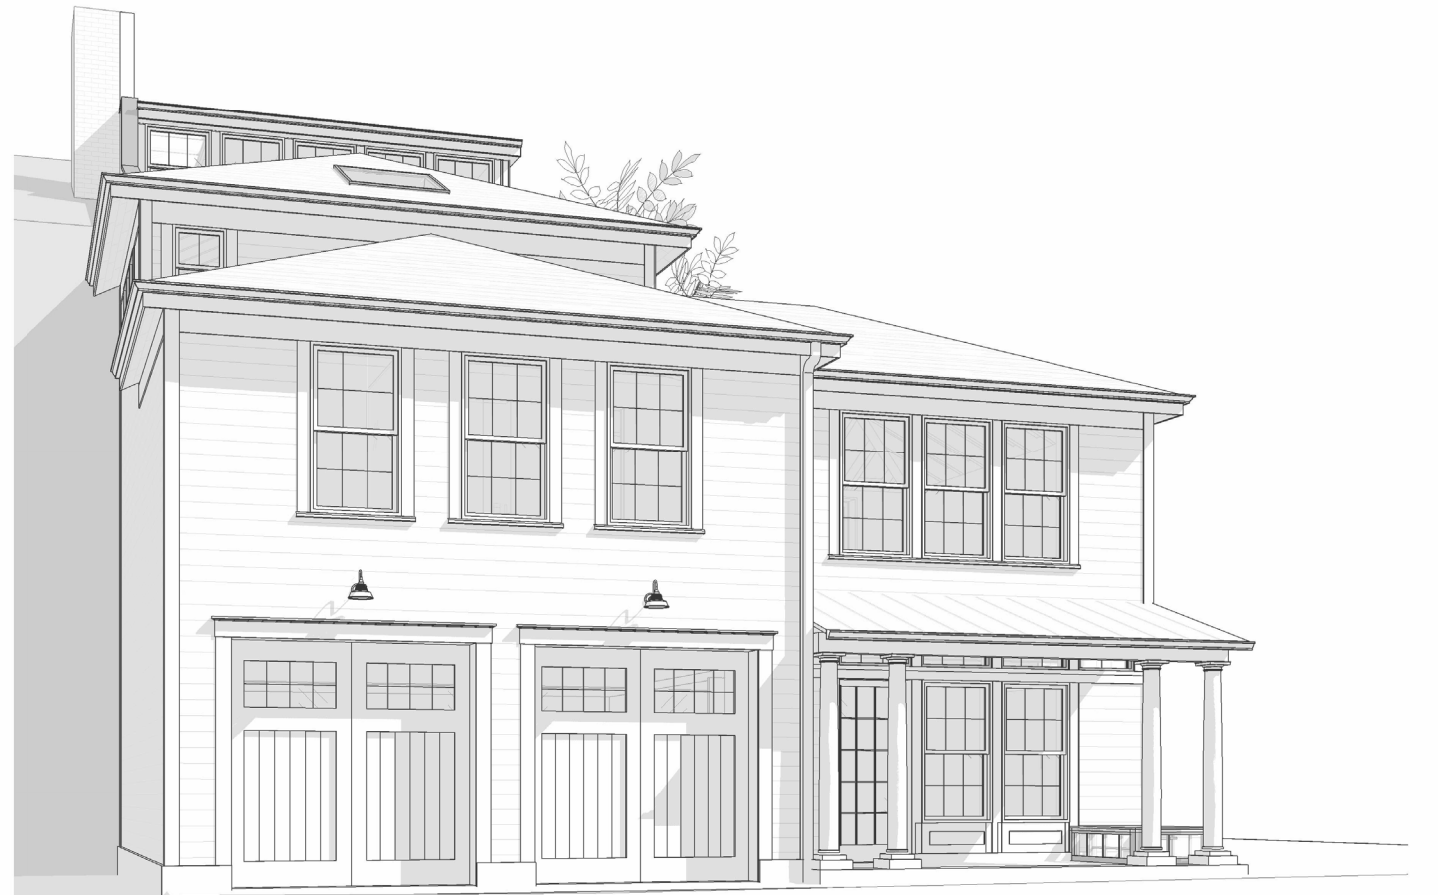


HDC APPROVED 05/04/2022

REVISED

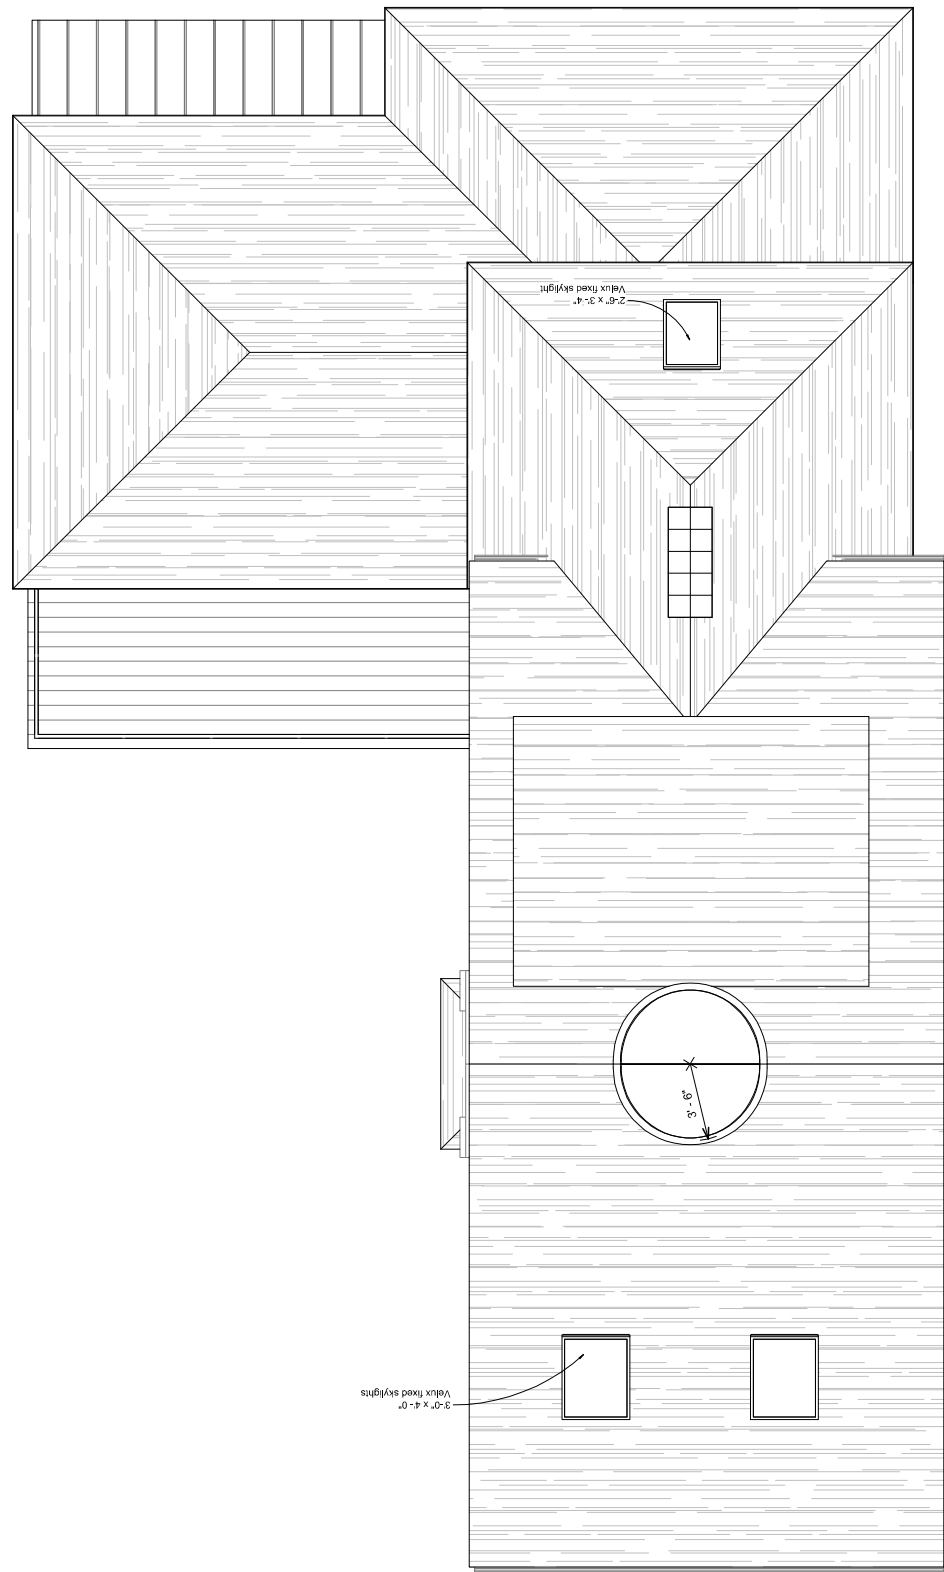

HDC APPROVED 05/04/2022

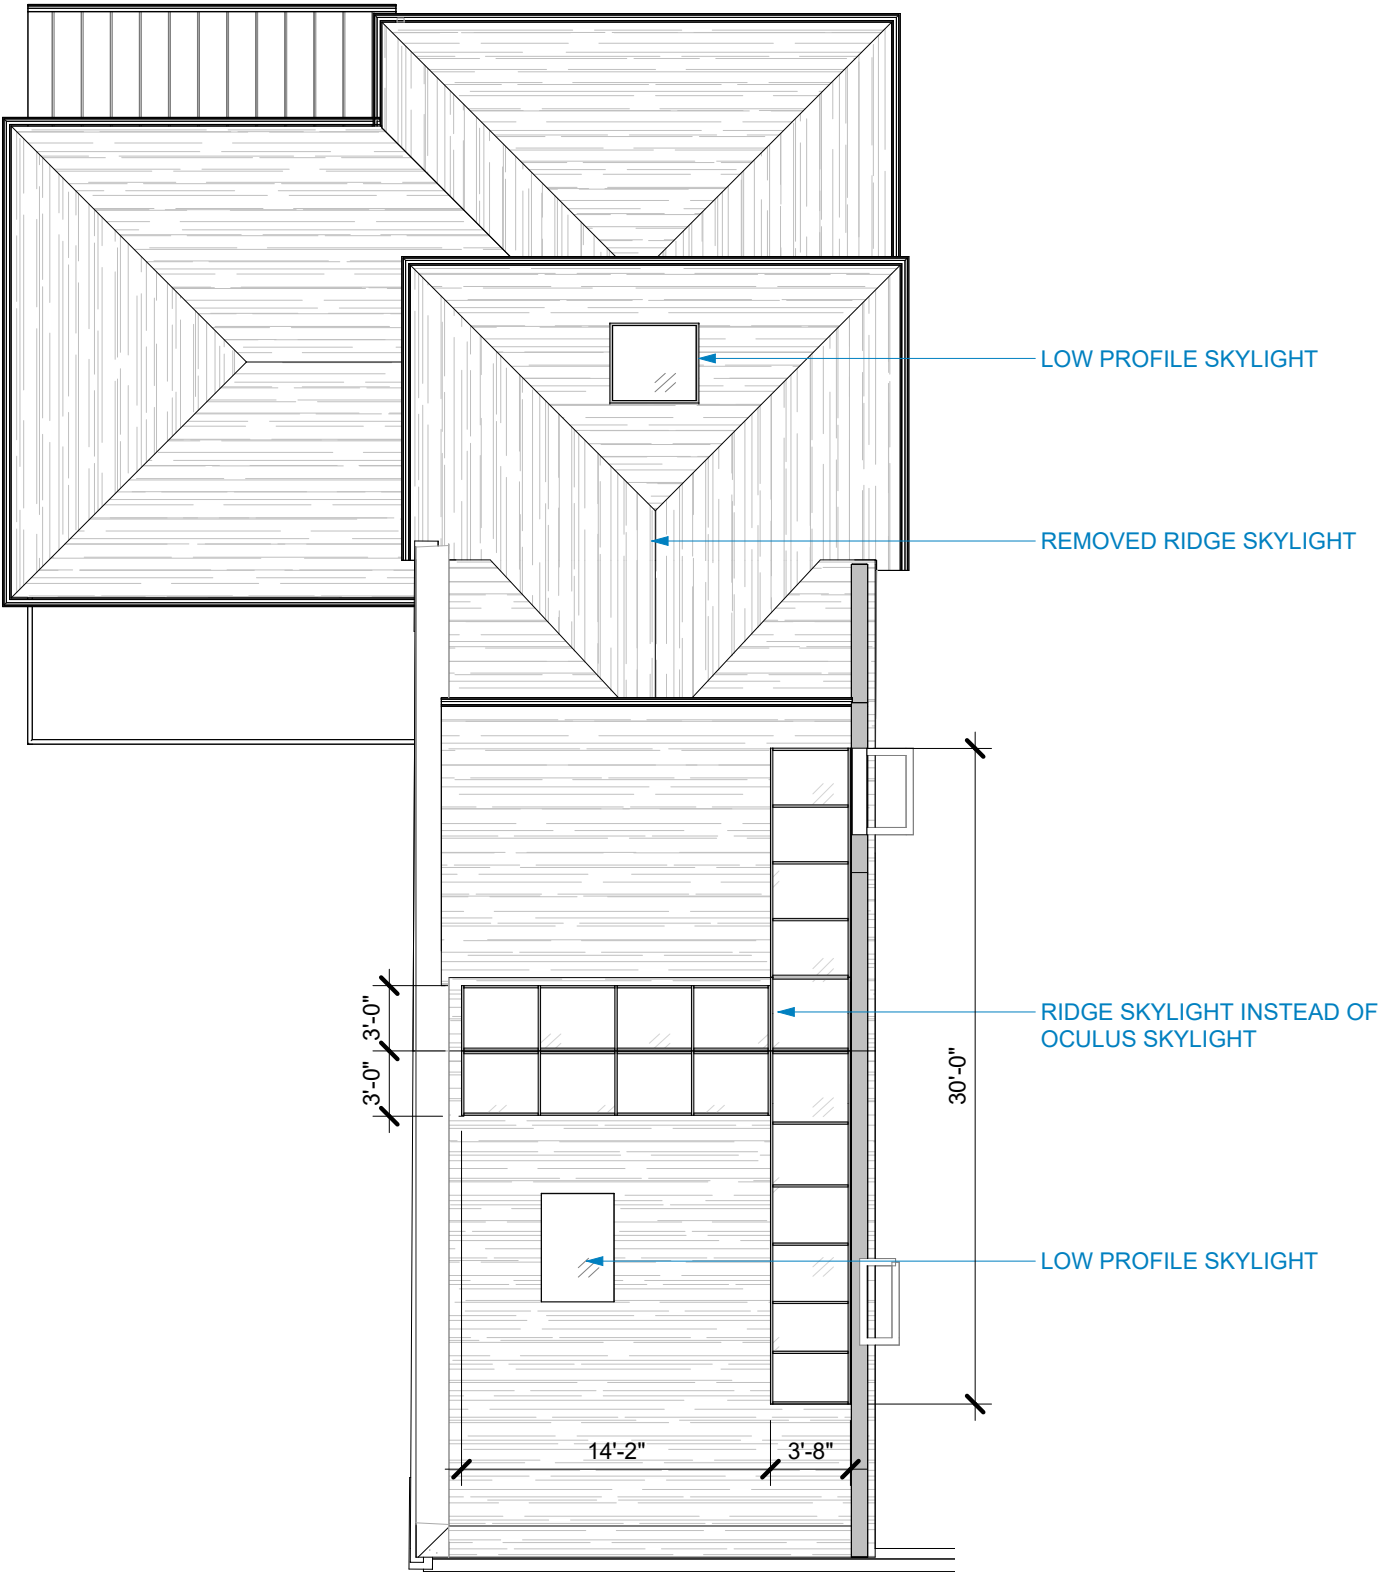


REVISED

# ROOF PLAN




REVISED ELEVATION

EAST ELEVATION

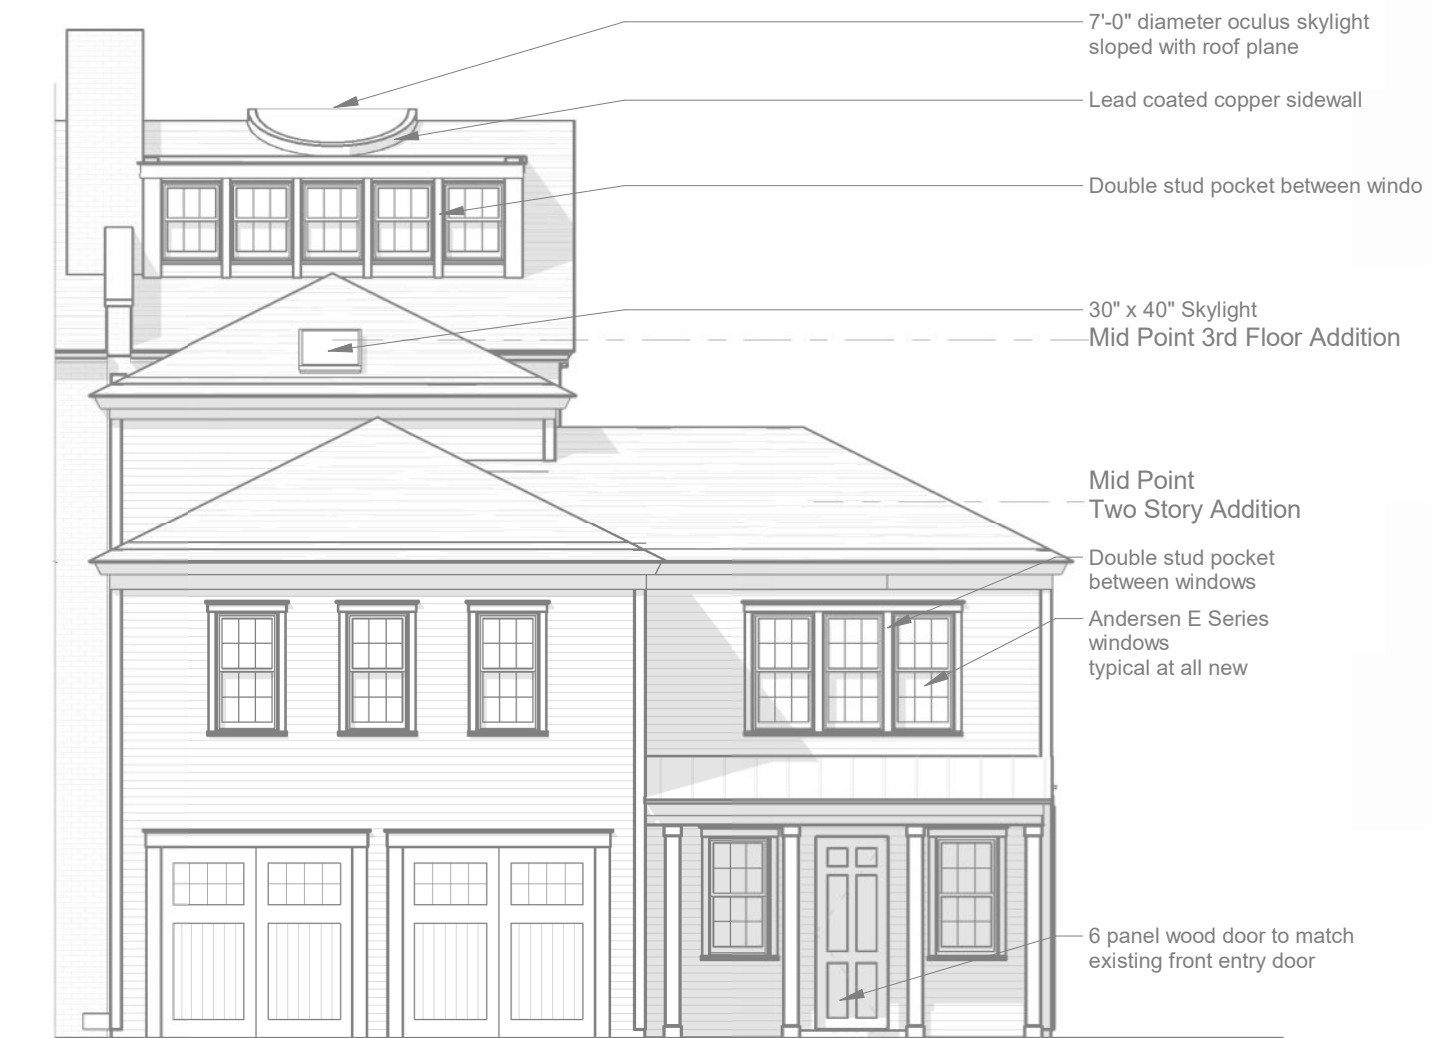

HDC APPROVED 05/04/2022

## NORTH ELEVATION

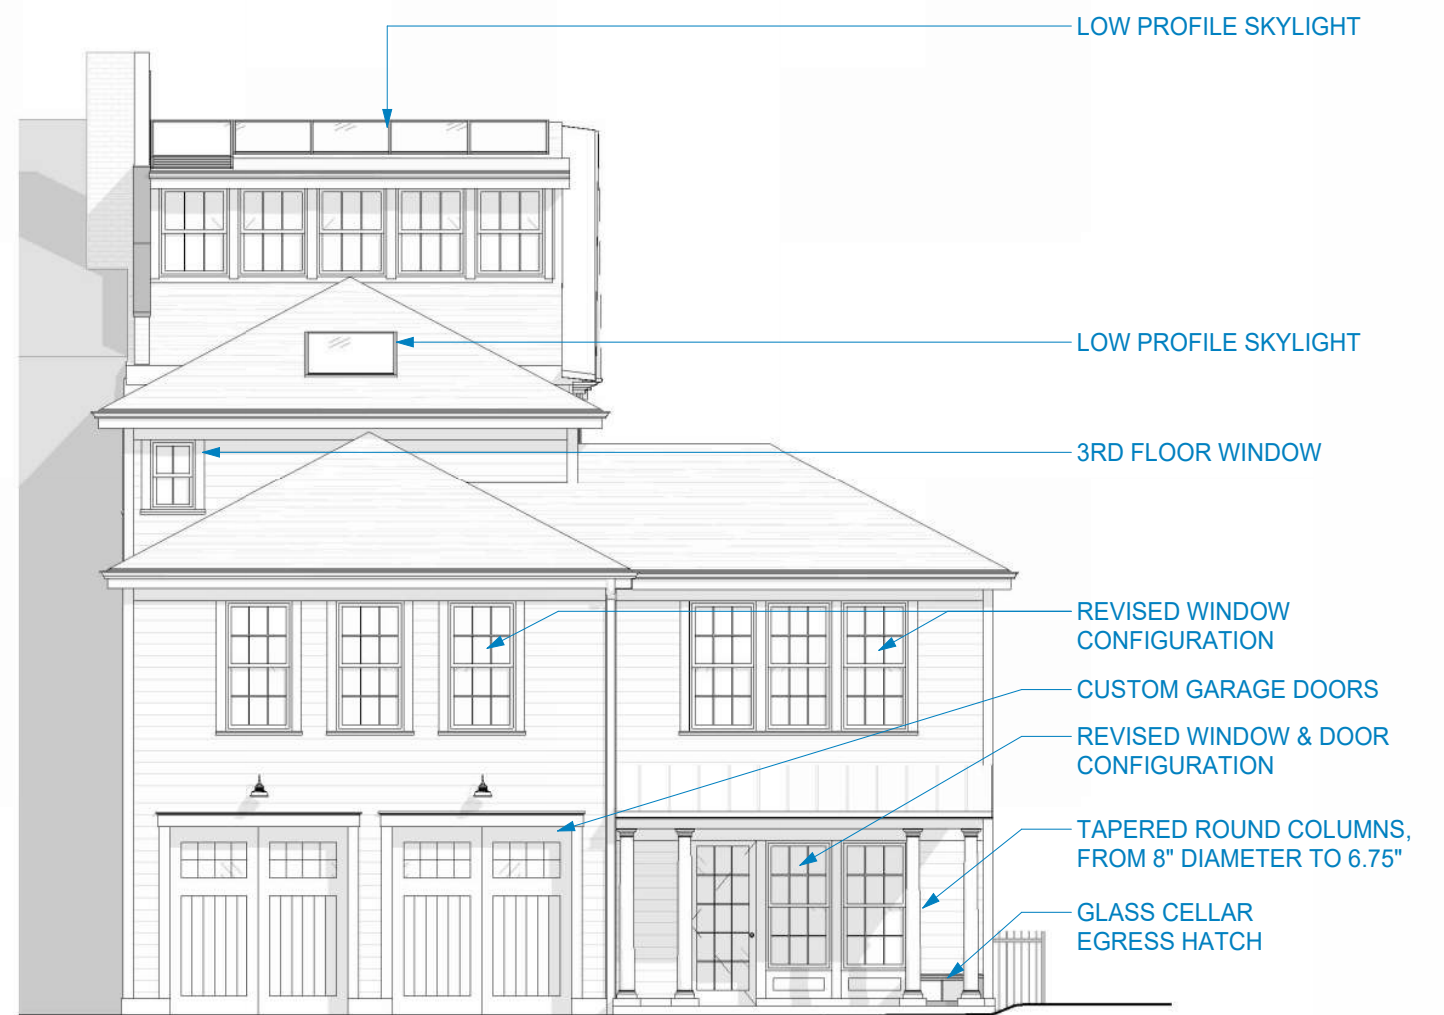

REVISED ELEVATION



HDC APPROVED 05/04/2022

Existing limestone band

LOW-PROFILE SKYLIGHT INSTEAD  
OF OCULUS

LOW PROFILE SKYLIGHT

WOOD AND GLASS DOOR


STEEL RAILING

HOPES OLD WORLD SUITE  
STEEL SOLARIUM



REVISED ELEVATION

## SOUTH ELEVATION

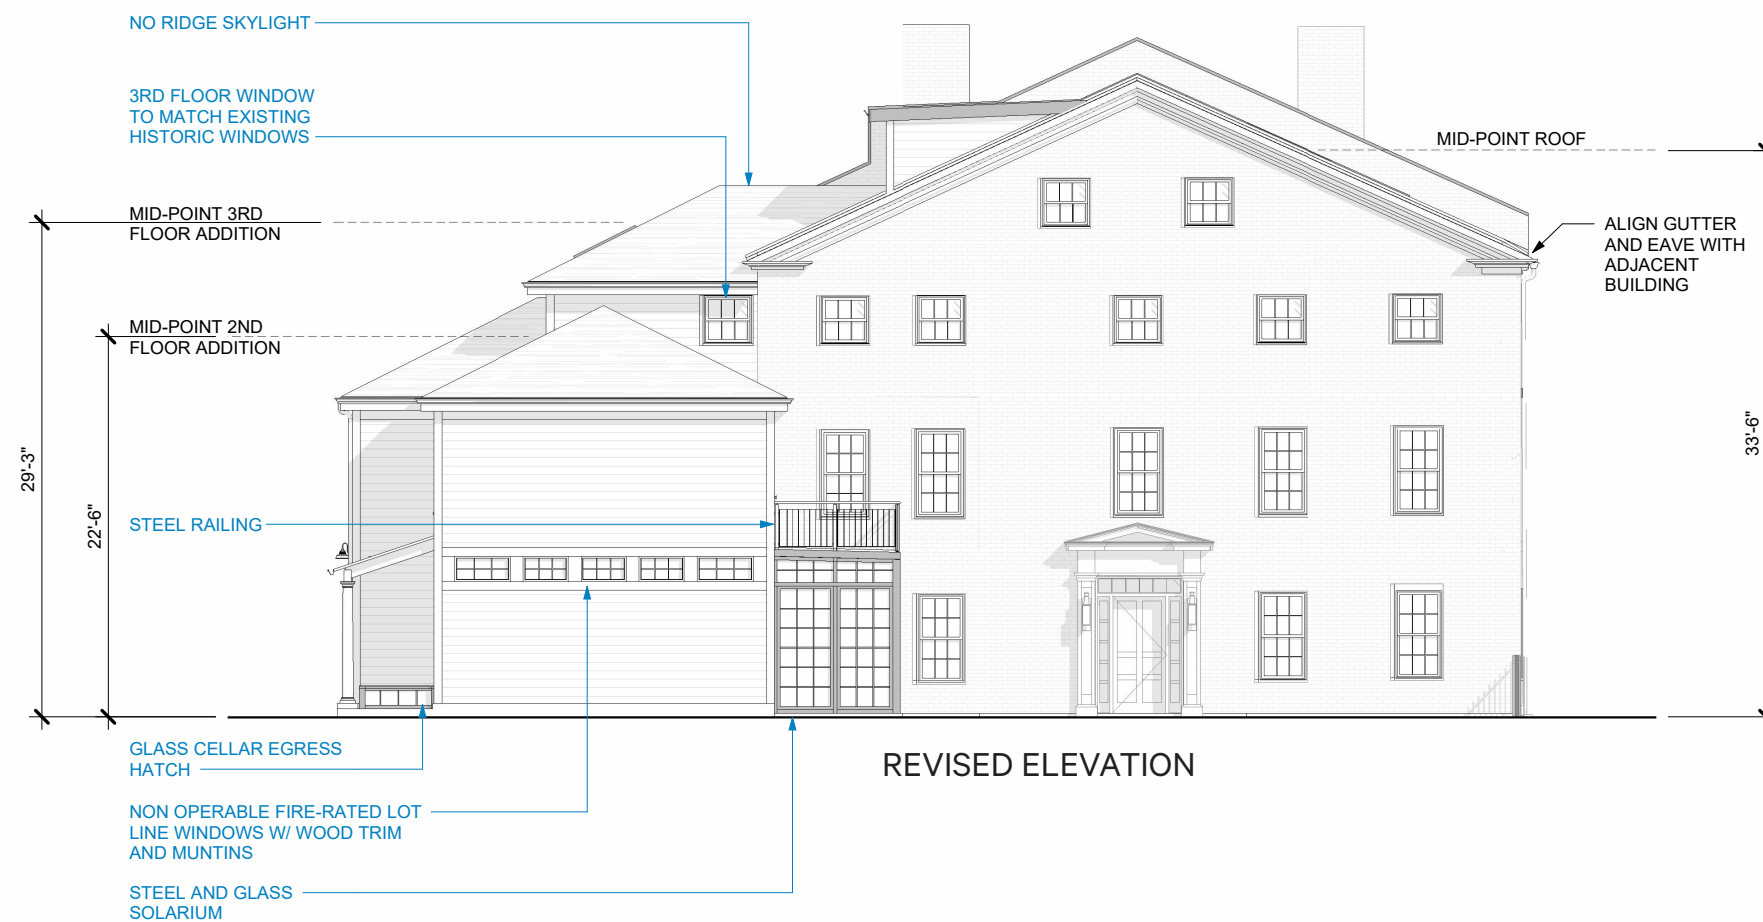

## WEST ELEVATION



Artistic Rendering - State Street Perspective

HDC APPROVED 05/04/2022



REVISED

# VIEW FROM CORNER OF STATE STREET




HDC APPROVED 05/04/2022



REVISED

## VIEW FROM SHEAFE STREET

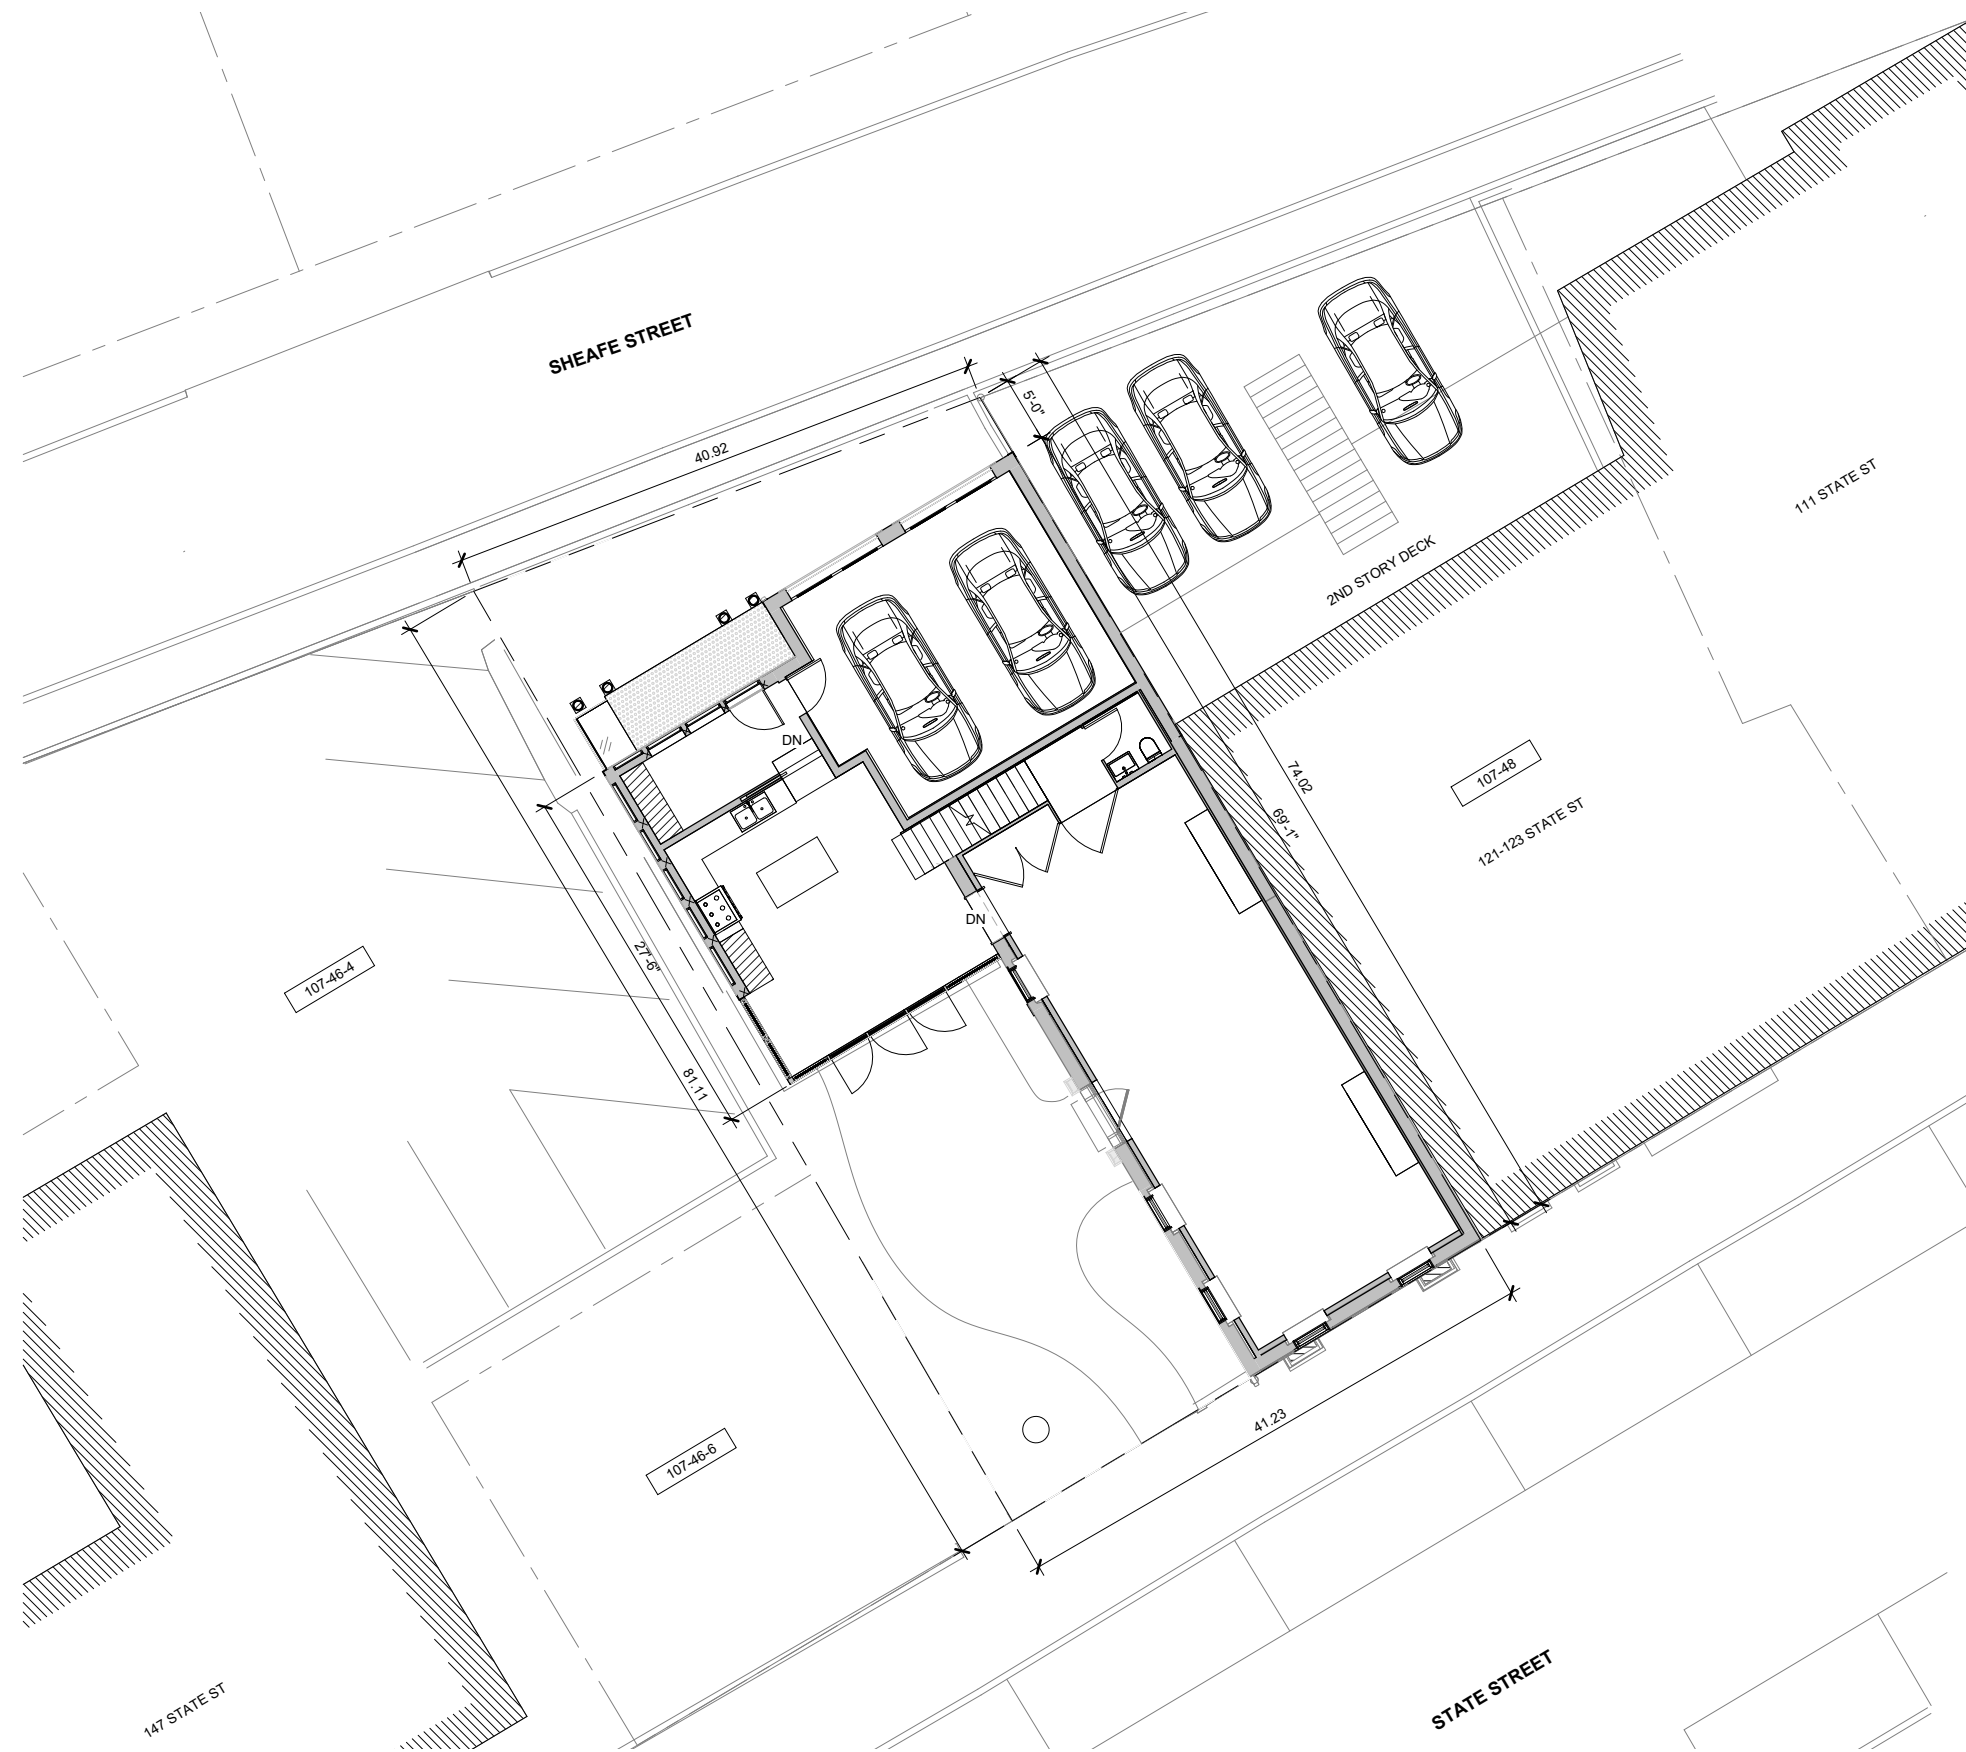

## PARKING PLAN




ALTERNATE - NO EAVE OVERHANG




ALTERNATE 2 - NO EAVE OVERHANG (BOTH SIDES)

- TERRACE RAILING
- SKYLIGHT AND PARAPET
- ROOF DETAILS
- FIRE-RATED WINDOWS
- GRANITE BASE
- TYPICAL OVERHANG
- GARAGE DOOR


# DETAILS

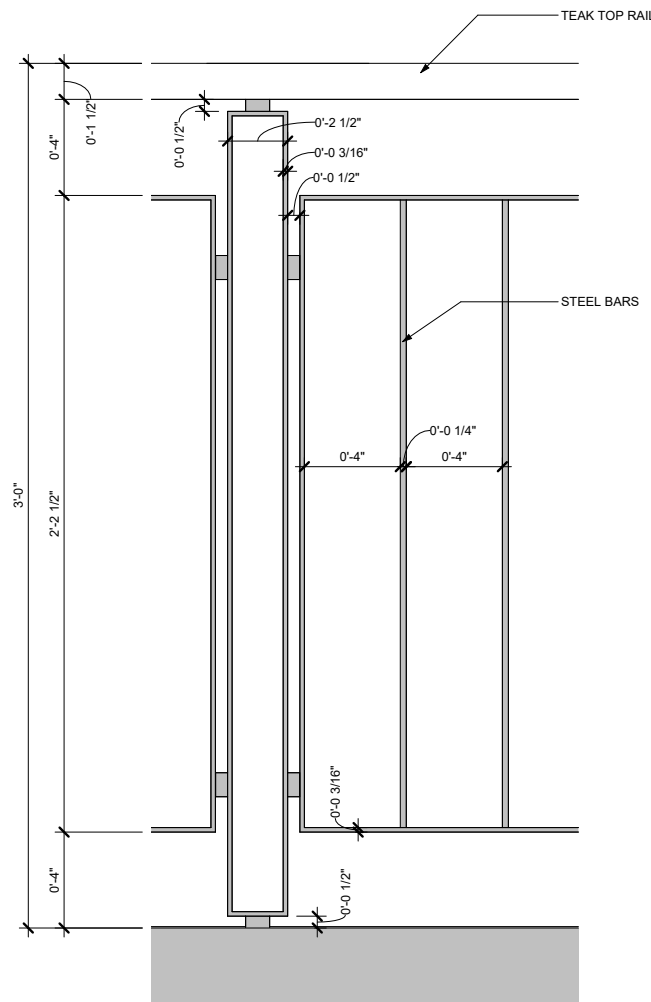


5 RAILING ELEVATION DETAIL  
3" = 1'-0"

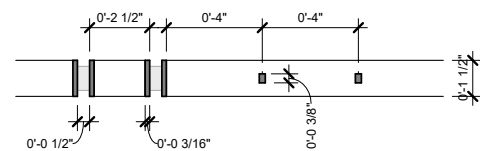


4 TERRACE RAILING PLAN DETAIL  
3" = 1'-0"

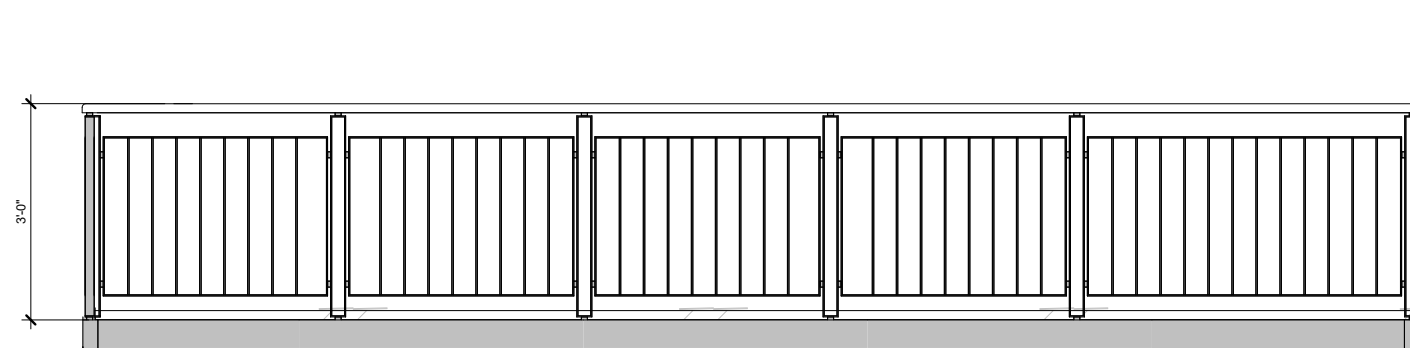


2 TERRACE RAILING FRONT ELEVATION  
3/4" = 1'-0"

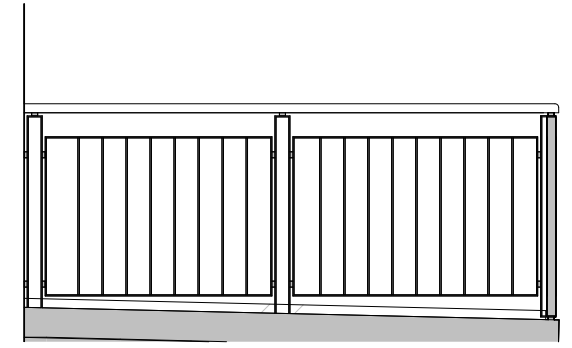

3 TERRACE RAILING SIDE ELEVATION  
3/4" = 1'-0"

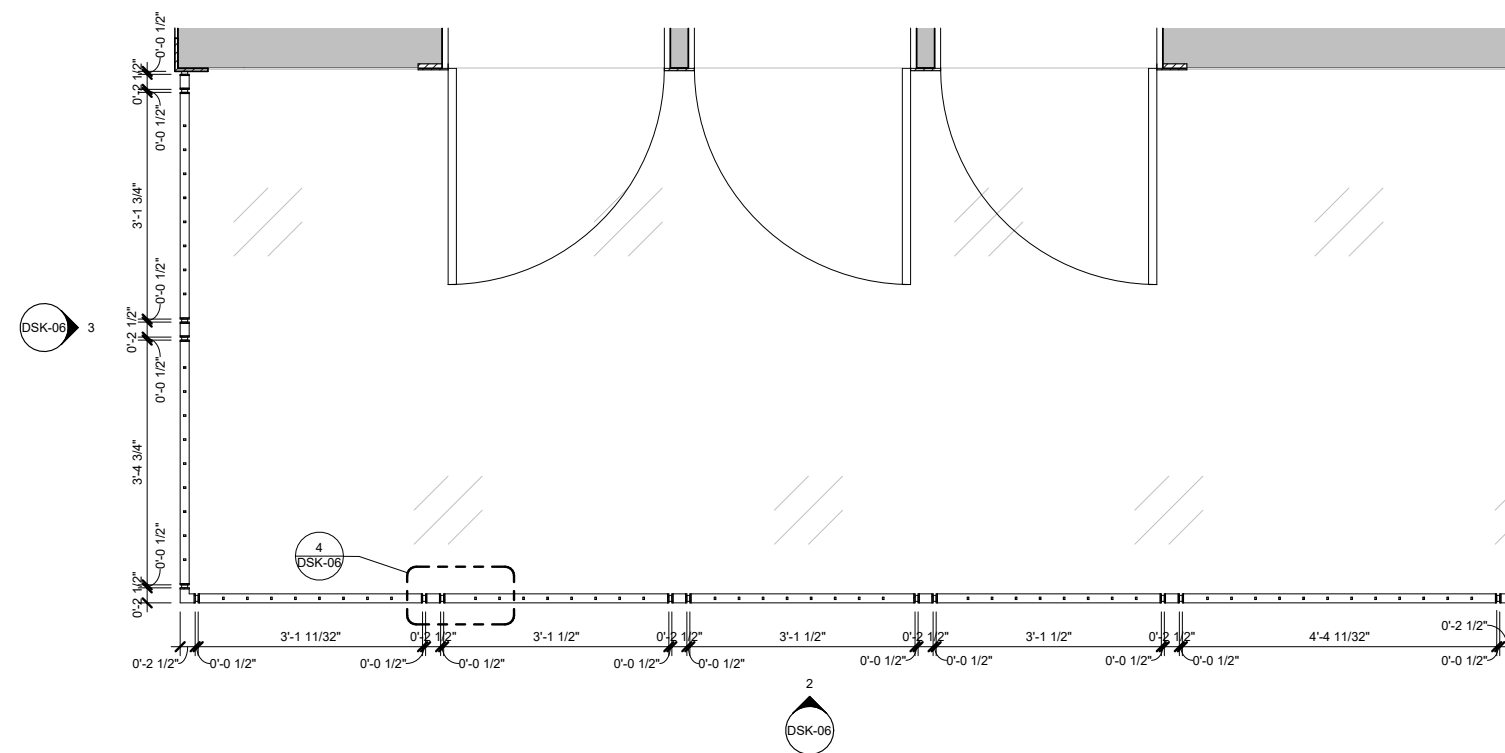


1 TERRACE RAILING  
3/4" = 1'-0"

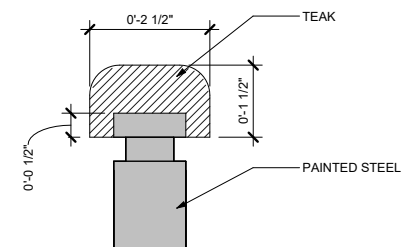


6 TOP RAIL SECTION DETAIL  
6" = 1'-0"


# TERRACE RAILING

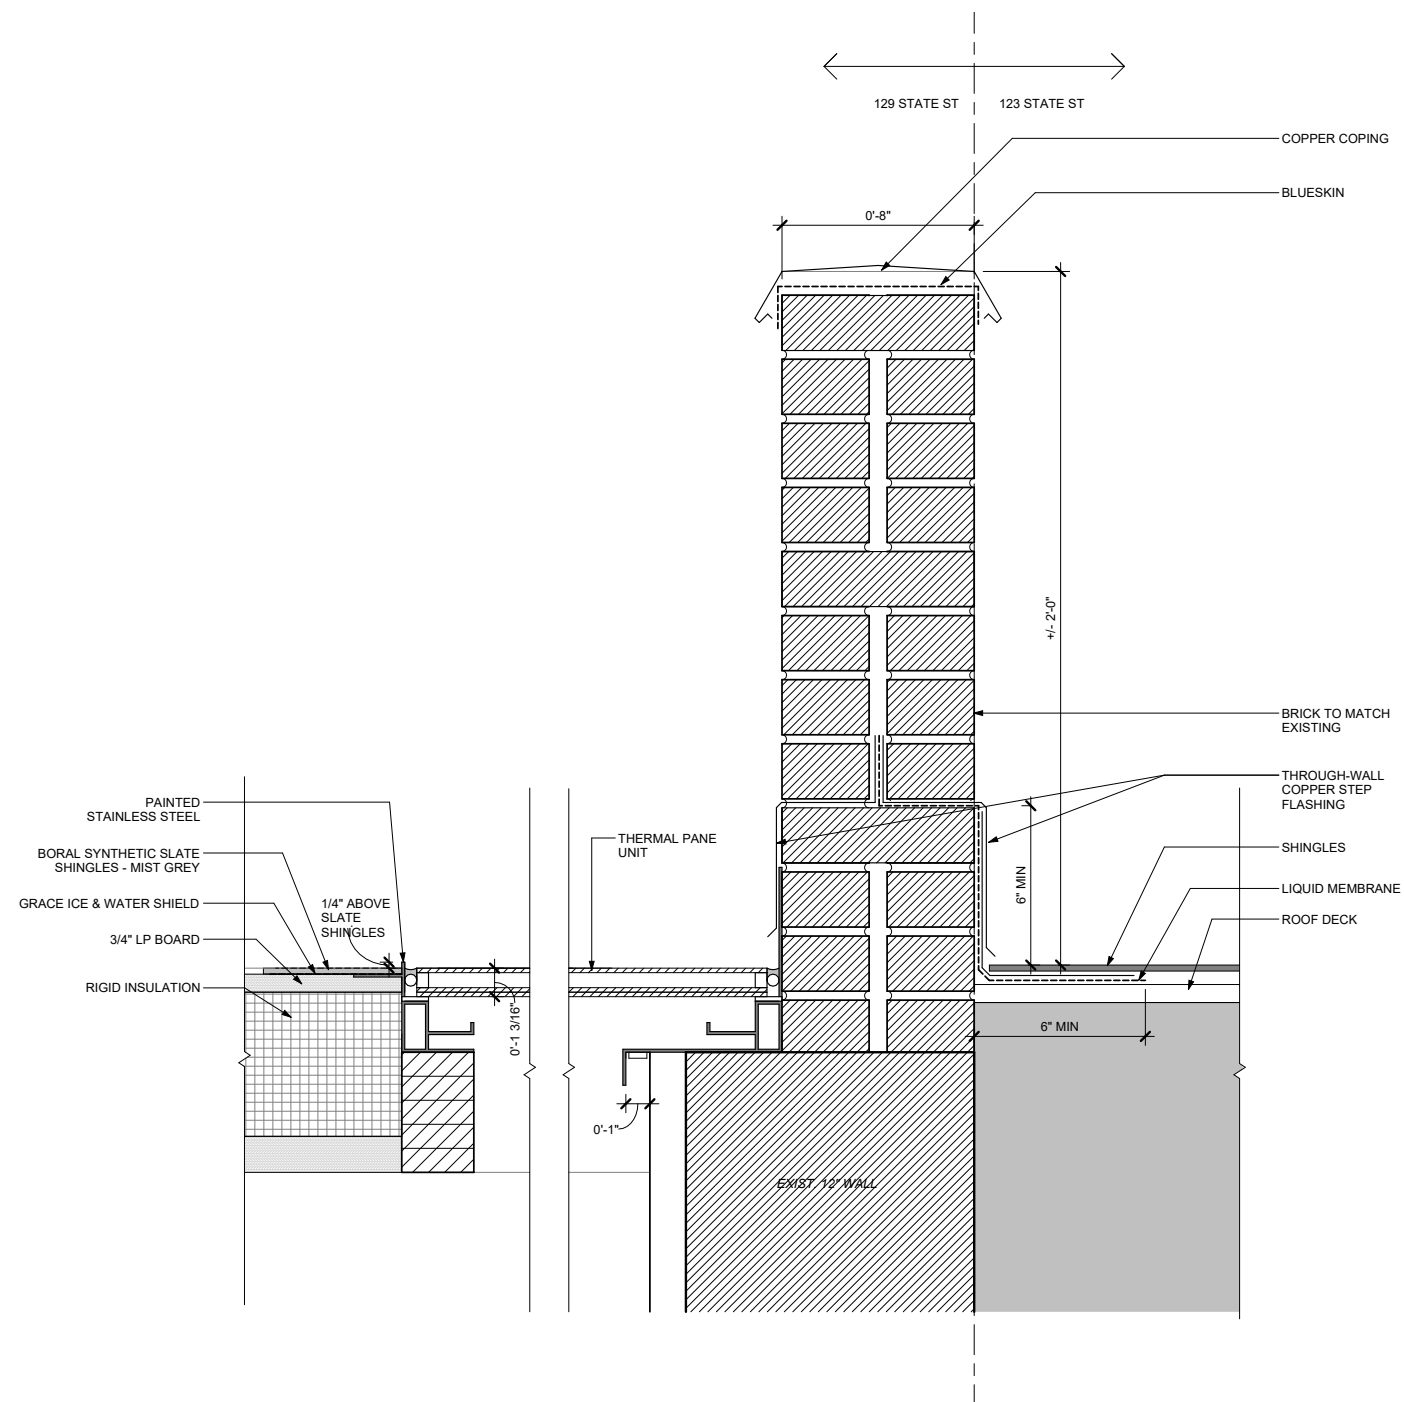


## SKYLIGHT AND PARAPET DETAIL

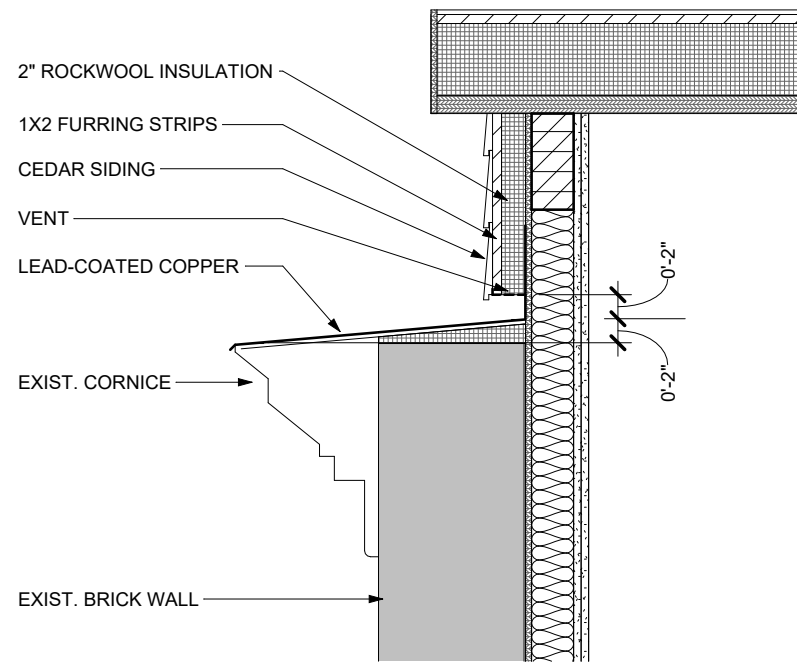

5 ROOF EDGE DETAIL AT DORMER WALL  
 1" = 1'-0"

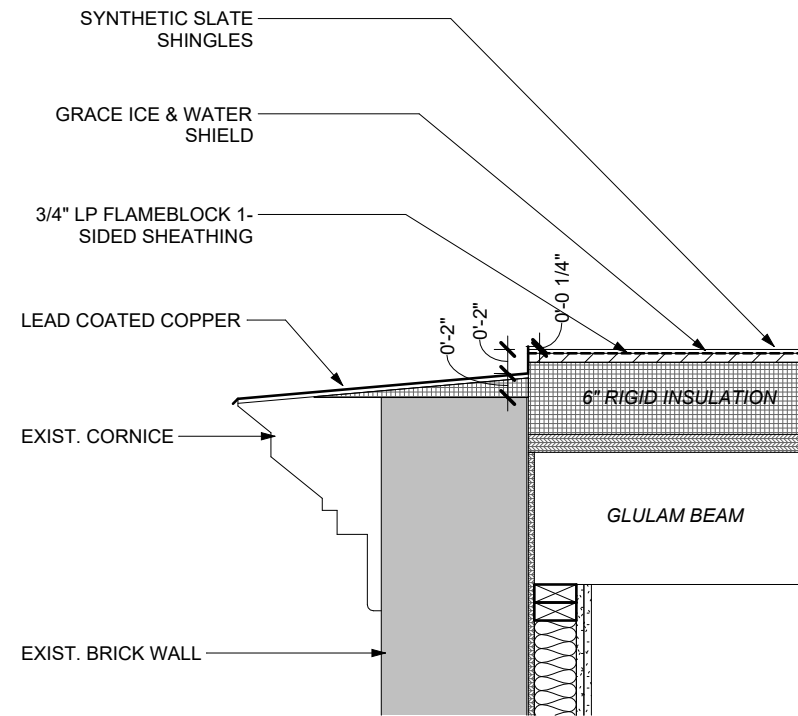


6 TYP. ROOF EDGE DETAIL AT WEST WALL  
 1" = 1'-0"

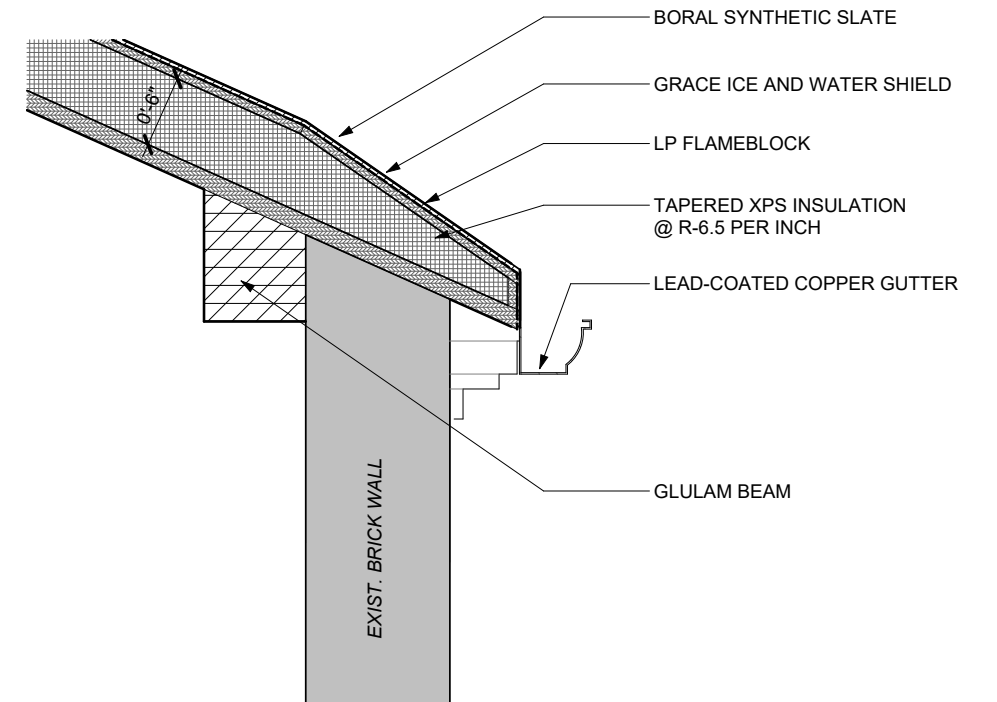


4 ROOF EDGE DETAIL AT EXIST. SOUTH WALL  
 1" = 1'-0"

## ROOF DETAILS

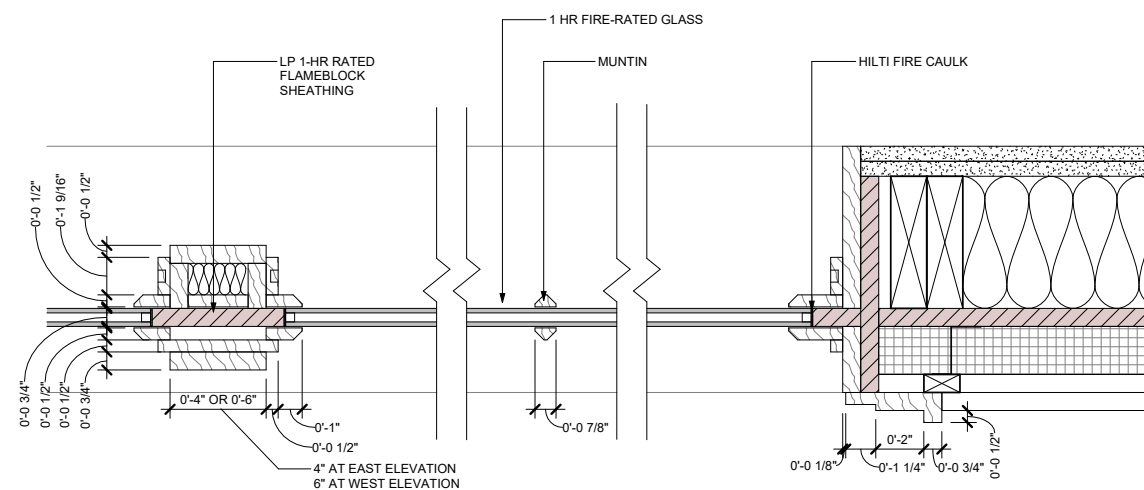


2 LOT LINE WINDOW PLAN DETAIL  
3" = 1'-0"

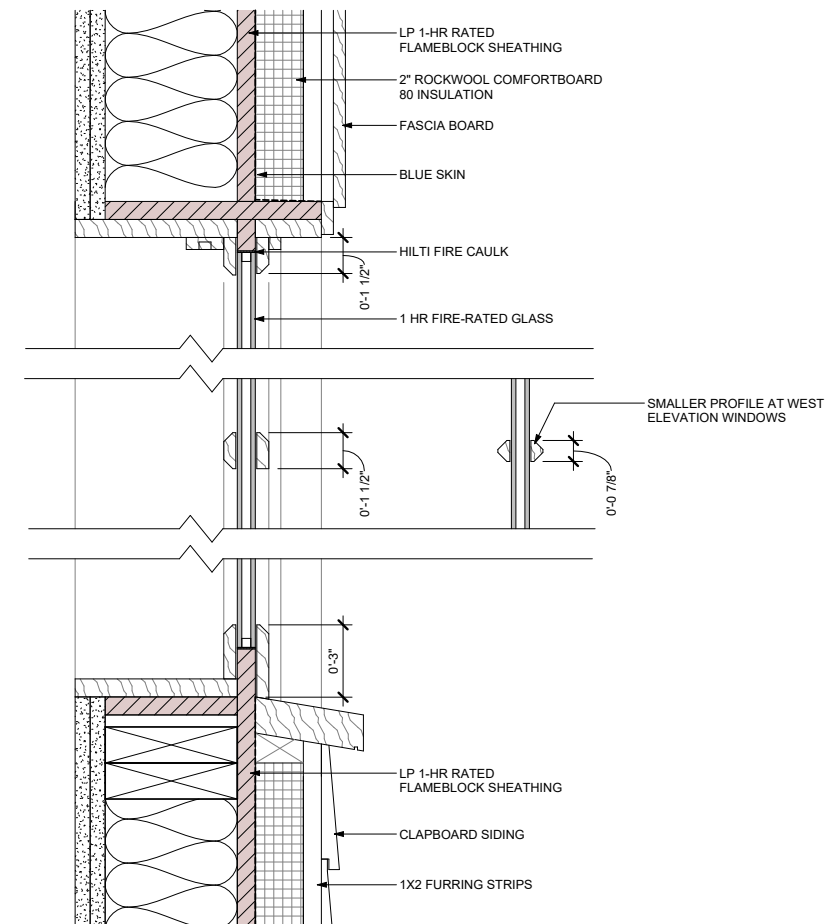


1 LOT LINE WINDOW SECTION DETAIL  
3" = 1'-0"


## FIRE RATED WINDOW DETAIL

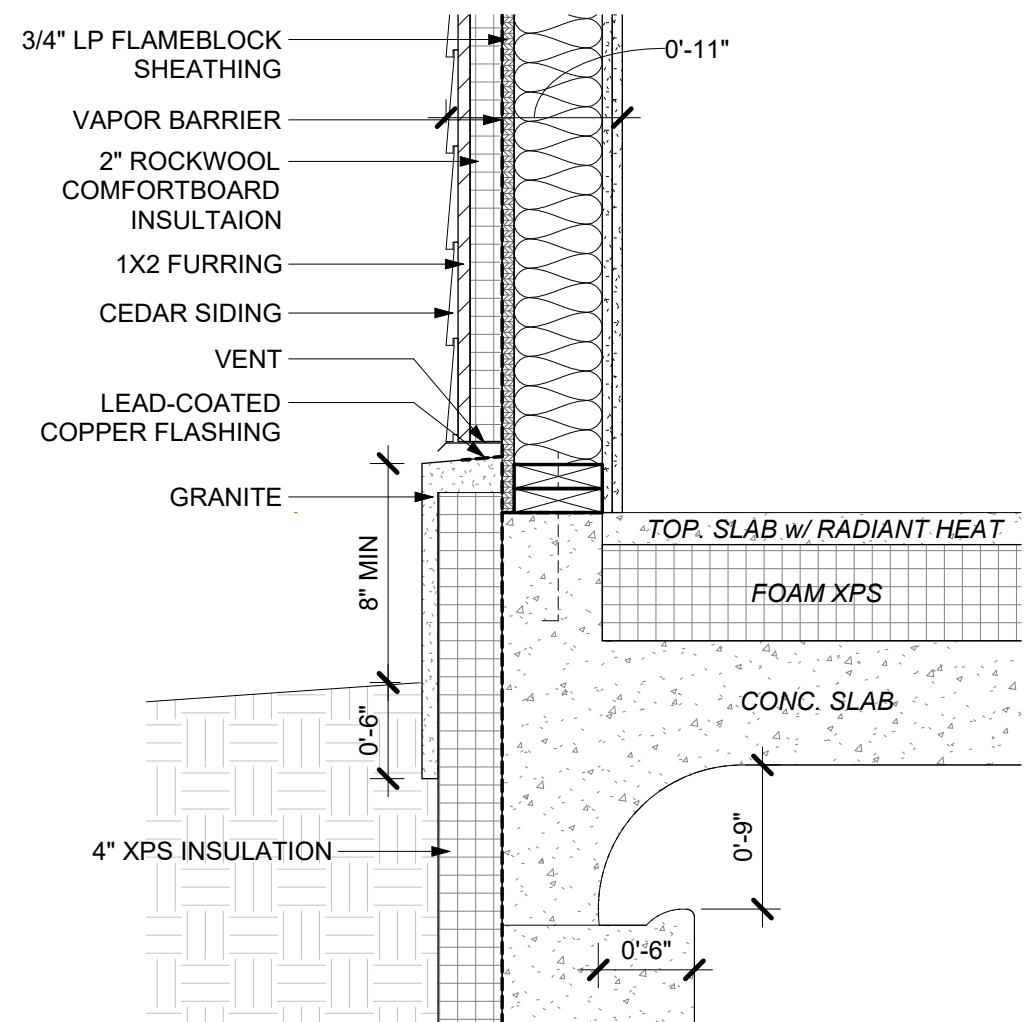

## GRANITE BASE DETAIL

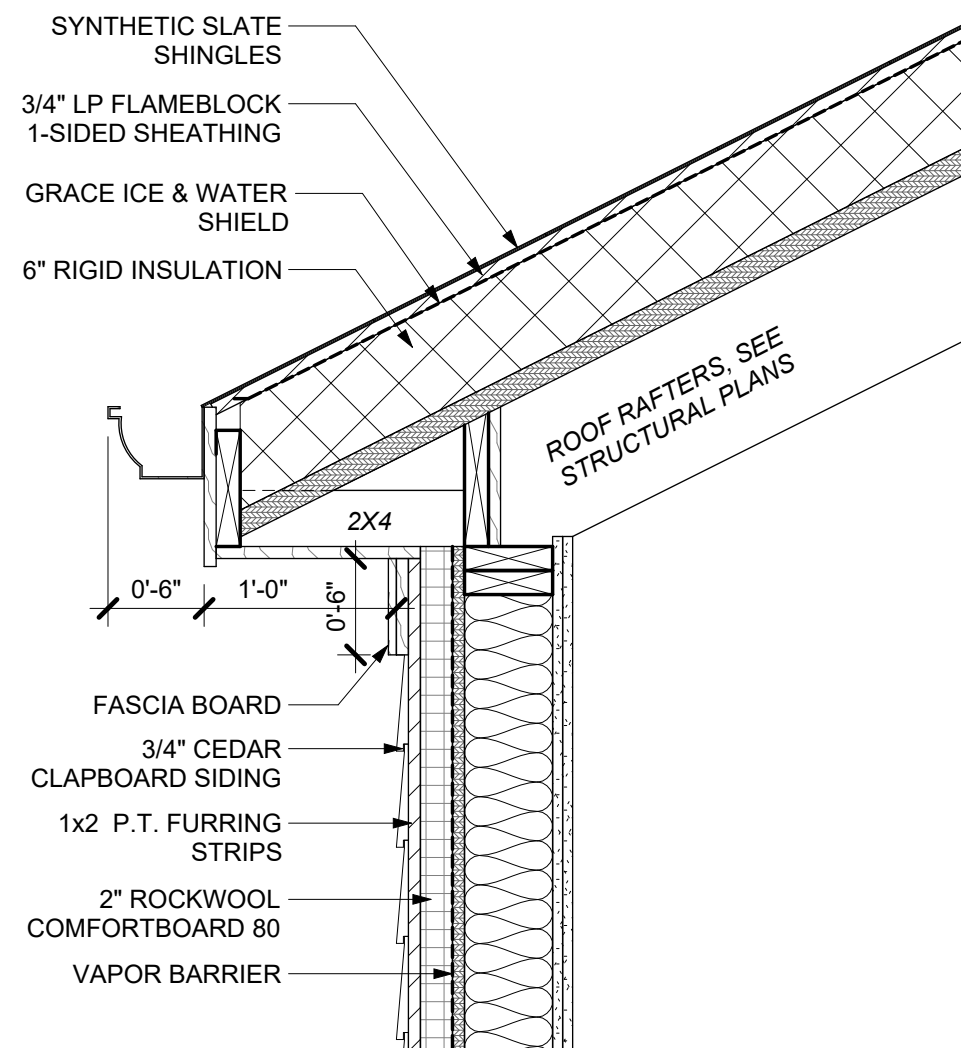

TYP. OVERHANG DETAIL

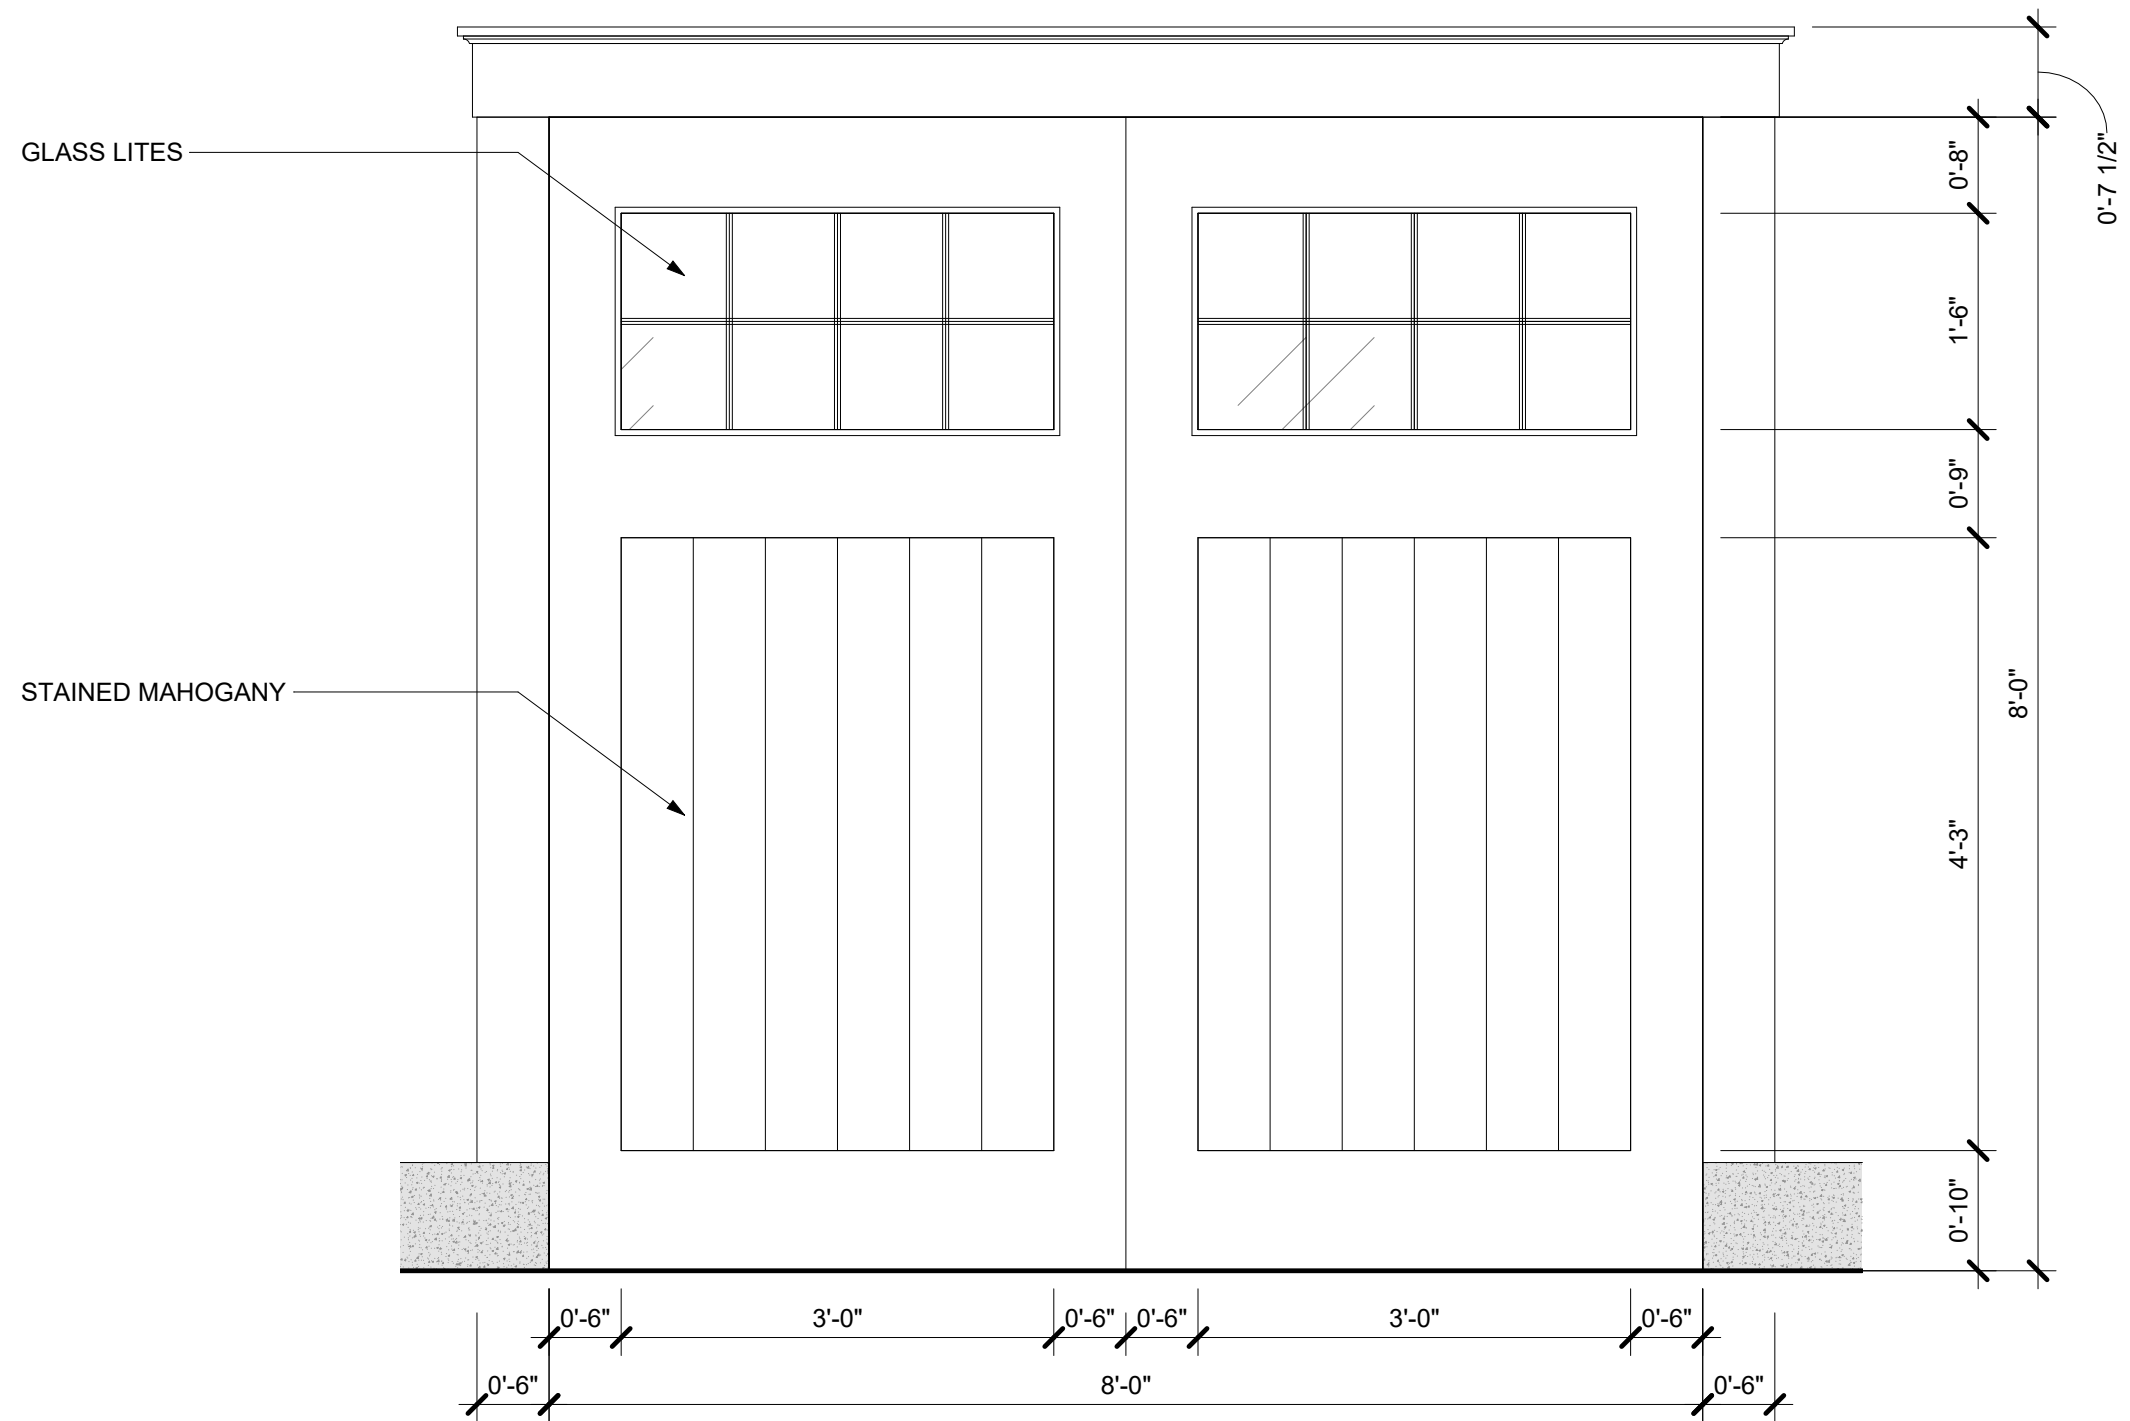

## CUSTOM GARAGE DOOR



- SOLARIUM DOORS AND WINDOWS
- ARCHITECTURAL COLUMNS
- EXTERIOR LIGHTING
- MATERIALITY
- WOOD WINDOWS
- SYNTHETIC SLATE SHINGLES

# MATERIALS AND SPECIFICATIONS


Hope's Old World Suite steel sections are specifically designed for projects calling for classical solid, hot-rolled steel windows with old world style three-point casement, or arrow-shaped, profiles. The fixed and operable configurations can be glazed with monolithic or insulated glass for energy efficiency. The unique window profiles and very narrow sightlines are ideal for new buildings as well as replacement projects.

## PRODUCT FEATURES


- Historically accurate sightlines and true divided lite or simulated divided lite muntins
- Unsurpassed strength of hot-rolled steel sections
- Accepts up to 7/8" thick insulating glass with simulated divided lites; up to 1/2" thick glass with true divided lites
- ASTM compliance for air infiltration and water penetration
- Hope's Power of 5 Finishing System with hot-dip galvanizing pretreatment
- Available with Hope's Thermal Evolution™ technology

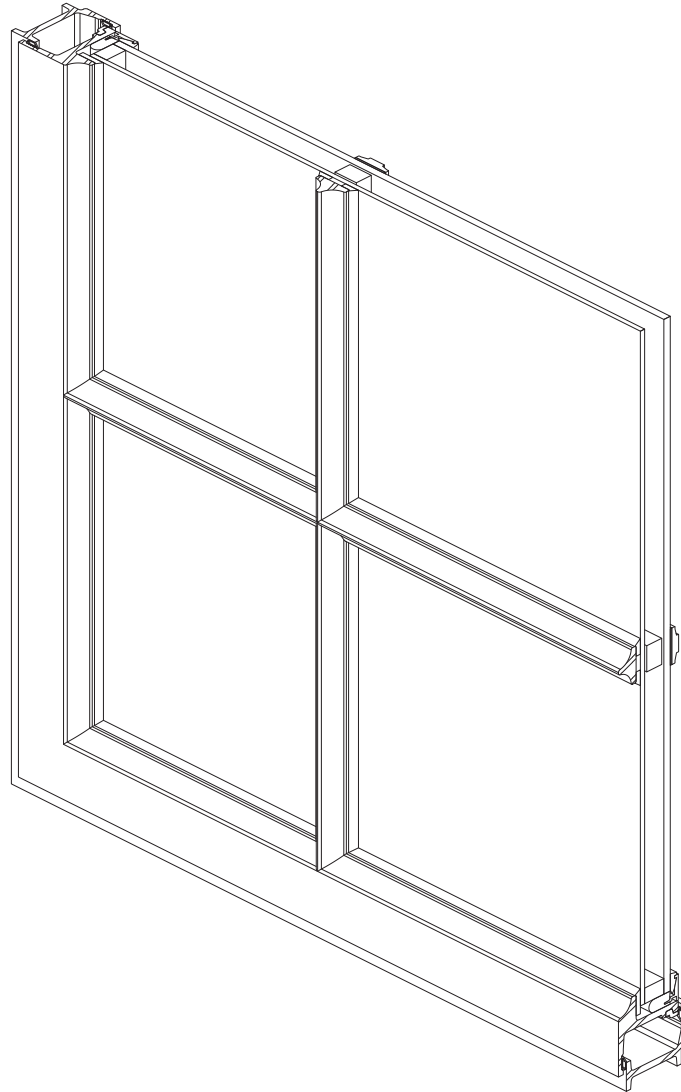


Fixed Window




Swing-Out Casement Window



Awning Window




Swing-In Casement Window




Hopper Window


## TYPICAL HEAD DETAILS

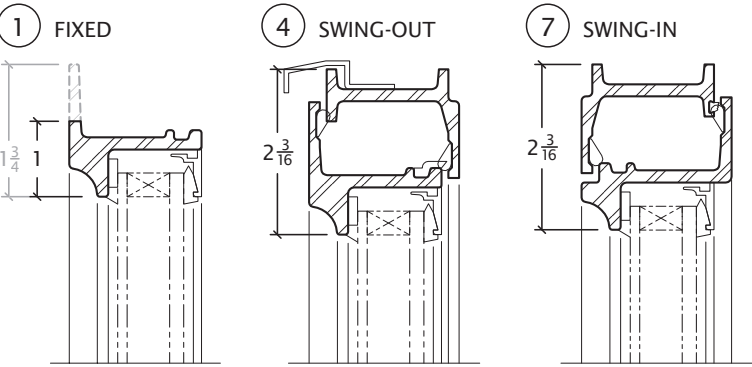

## TYPICAL JAMB DETAILS

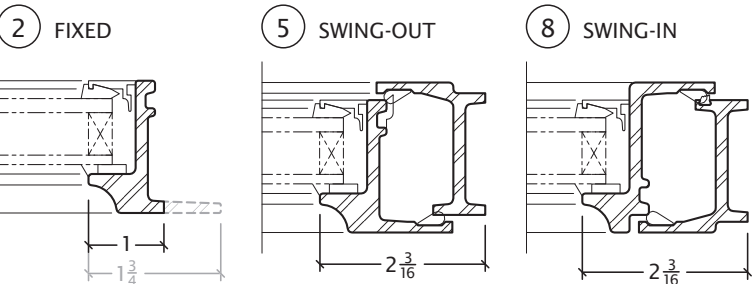


## TYPICAL SILL DETAILS

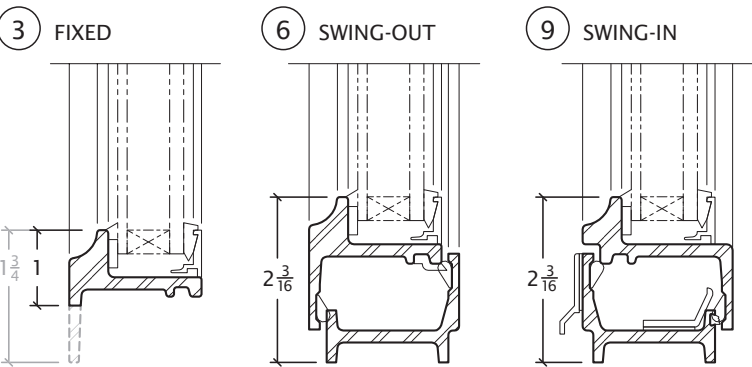

Details are half scale and shown inside glazed with 7/8" thick glass.  
Perimeter frame profiles are available in long leg or equal leg configurations.  
All Hope's products are custom manufactured to your specific project requirements.




# SOLARIUM DOORS AND WINDOWS

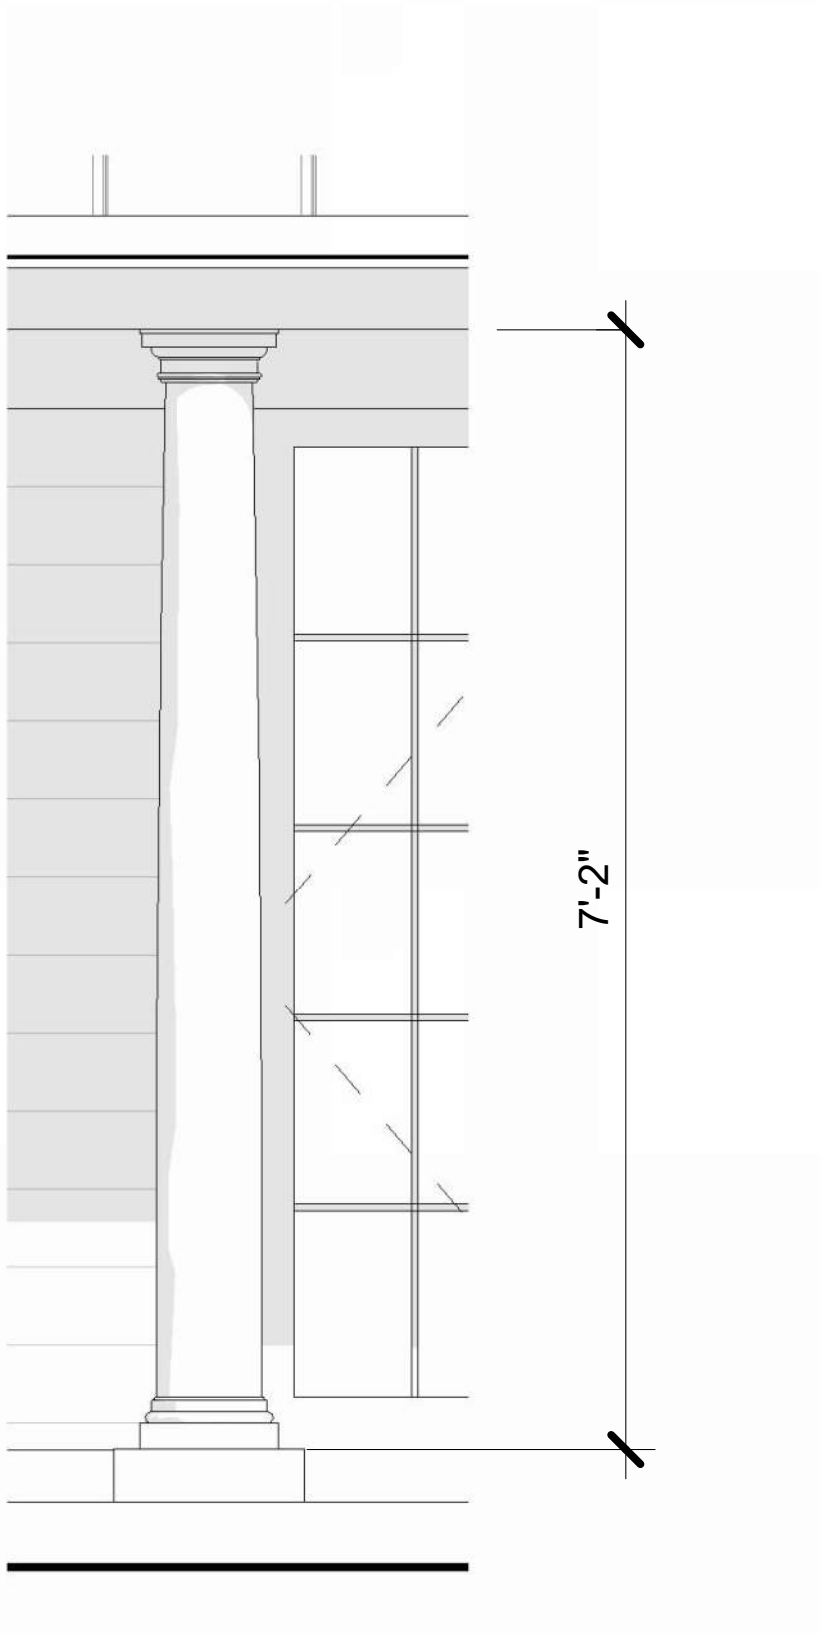

Round Tapered **PERMA**Cast® Columns

| COL. SIZE | A       | B       | C       | D      | E      | F      | G      | J      | K      | L       | O      | N       | R       | T       | LENGTHS AVAIL. (ft.)          |
|-----------|---------|---------|---------|--------|--------|--------|--------|--------|--------|---------|--------|---------|---------|---------|-------------------------------|
| 6"        | 5 1/4"  | 4 1/4"  | 9"      | 1 1/2" | 1 1/4" | 3/4"   | 3/4"   | 1 1/4" | 1 3/4" | 8"      | 1"     | 6 1/4"  | 3 3/4"  | 4 1/4"  | 4,6,8                         |
| 8"        | 7 1/4"  | 6 1/4"  | 10 1/2" | 1 1/4" | 1 1/4" | 3/4"   | 3/4"   | 1 1/4" | 1 1/4" | 9 1/4"  | 1 1/2" | 2 1/4"  | 4 1/4"  | 4 1/2"  | 5,6,8,10,12                   |
| 10"       | 9 1/4"  | 8 1/4"  | 13 1/4" | 2 1/4" | 2 1/4" | 3/4"   | 3/4"   | 1 1/4" | 1 3/4" | 11 1/4" | 3/4"   | 2 1/4"  | 5 1/4"  | 5"      | 6,8,10,12,14                  |
| 12"       | 11 1/4" | 9 1/4"  | 16 1/4" | 2 1/4" | 2 1/4" | 3/4"   | 3/4"   | 1 1/4" | 2 1/4" | 13 1/4" | 3/4"   | 2 1/4"  | 6 1/4"  | 5 1/4"  | 6,8,10,12,14,16,18            |
| 14"       | 13 1/4" | 11 1/4" | 19 1/4" | 3 1/4" | 3 1/4" | 1 1/4" | 1"     | 2"     | 2 1/4" | 17"     | 3/4"   | 2 1/4"  | 7 1/4"  | 7"      | 8,10,12,14,16,18,20           |
| 16"       | 15 1/4" | 13 1/4" | 22"     | 3 1/4" | 3 1/4" | 1 1/4" | 1 1/4" | 2 1/4" | 2 1/4" | 19 1/4" | 1"     | 3"      | 8 1/4"  | 8"      | 8,10,12,14,16,18,20,22,24,26  |
| 18"       | 17 1/4" | 15 1/4" | 24 1/4" | 4"     | 4"     | 1 1/4" | 1 1/4" | 2 1/4" | 3 1/4" | 22 1/4" | 1 1/2" | 10 1/4" | 9 1/4"  | 8 1/4"  | 10,12,14,16,18,20,22,24,26    |
| 20"       | 19 1/4" | 17 1/4" | 27"     | 4 1/4" | 4 1/4" | 2"     | 1 1/4" | 2 1/4" | 3 1/4" | 24 1/4" | 1 1/2" | 10 1/4" | 11 1/4" | 9"      | 12,14,16,18,20,22,24,26       |
| 22"       | 21 1/4" | 19 1/4" | 30 1/4" | 5"     | 5"     | 2"     | 1 1/4" | 3"     | 3 1/4" | 27 1/4" | 1 1/2" | 10 1/4" | 12"     | 10 1/4" | 12,14,16,18,20,22,24,26,28,30 |
| 24"       | 23 1/4" | 21 1/4" | 33 1/4" | 6"     | 5 1/4" | 2 1/4" | 2"     | 3 1/4" | 4"     | 30 1/4" | 1 1/2" | 10 1/4" | 13 1/4" | 11 1/4" | 12,14,16,18,20,22,24,26,28,30 |
| 28"       | 28"     | 24 1/4" | 38"     | 6 1/4" | 6 1/4" | 2 1/4" | 2 1/4" | 3 1/4" | 4 1/4" | 33 1/4" | 1 1/2" | 10 1/4" | 15 1/4" | 11 1/4" | 20,22,24,26,28                |
| 30"       | 29 1/4" | 26 1/4" | 41 1/4" | 6 1/2" | 5 1/4" | 2 1/2" | 3"     | 4"     | 4 1/4" | 38 1/4" | 1 1/2" | 10 1/4" | 14 1/4" | 14 1/4" | 20,22,24,26,28,30             |

\*There may be a variance of up to 1/4" in all dimensions. Fluted columns available in all diameters. See page 16 for Parallel dimensions. See page 18 for Decorative Capital dimensions. Standard Fluted Column (Fluted in mold)  
• Split columns are not load bearing.

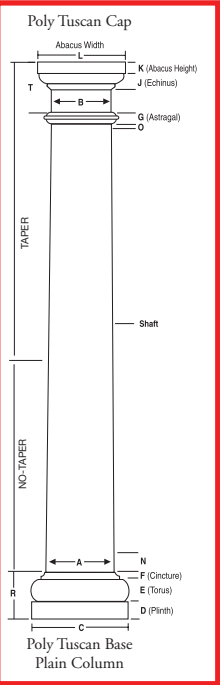

**COLUMN-LOC®**  
Column-Loc® creates a continuous connection from floor to beam/header without the expense of splitting and reattaching the column. This labor saving product is easy to install and delivers wind uplift resistance especially important in coastal and high wind areas. Currently available for 8" and 10" round (tapered and no-taper) and square PermaCast® columns. Kits are available with and without threaded rod in lengths up to 12'\*




**ROUND PERMACAST® INSIDE DIMENSIONS**  
Inside dimension may vary up to 1/8". Splitting a column will decrease inside dimension 1/8".

| COLUMN SIZE | TOP I.D. | BOT I.D. |
|-------------|----------|----------|
| 6"          | 3 1/4"   | 4 1/4"   |
| 8"          | 5 1/2"   | 6 1/4"   |
| 10"         | 7 3/4"   | 8 1/4"   |
| 12"         | 8 3/4"   | 10 1/4"  |
| 14"         | 10 1/4"  | 12 1/4"  |
| 16"         | 12 1/4"  | 15"      |
| 18"         | 14 1/2"  | 16 1/4"  |
| 20"         | 16 1/4"  | 18 1/4"  |
| 22"         | 18 1/4"  | 20 1/4"  |
| 24"         | 20"      | 22 1/4"  |
| 28"         | 22 1/4"  | 26 1/4"  |
| 30"         | 25 1/4"  | 28 1/4"  |

\*Plain columns only


**PLUMB-FIT®**  
To make installation even easier our 6"-12" round and square poly Tuscan Cap and Base Sets with flashing cap come with the Plumb-Fit® patented (Patent 9689674) installation system included.

**ROUND PERMACAST® PORCH INSTALLATION BRACKET**  
The HB&G Porch Installation Bracket includes the bracket and all required hardware. The bracket fits 20" - 30" Plain Round PermaCast® Columns and will secure a 2nd story porch to our PermaCast® Columns. Three brackets are required for each column.

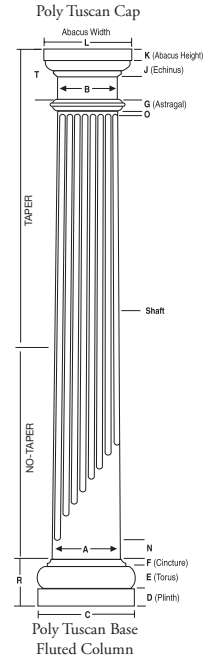

ARCHITECTURAL COLUMNS

FRONT DOOR GAS LIGHTS

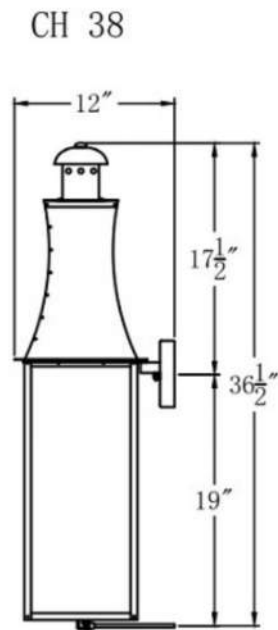



- The Churchill 38 Lantern**
- Manufacturer: The Coppersmith
  - Series: Churchill
  - Model Number: CH38
  - Electric: Triple 60w Candelabra Bulbs
  - Natural Gas or Propane Gas: Single Open Flame Burner
  - Finish: Antique Copper
  - Solid 20 oz Copper Construction
  - Riveted & Soldered Construction
  - Solid Brass Hinges, Door Latches & Hardware
  - Tempered Glass

PORCH ELECTRIC SCONCES



- **Actual Size:** 19"Hx8"Wx9.5"D
- **Backplate/Canopy Size:** 10"Hx5.25"W Rectangular
- **Color:** Black / Burnished Bronze / Seeded Glass

GARAGE LIGHTING FIXTURES

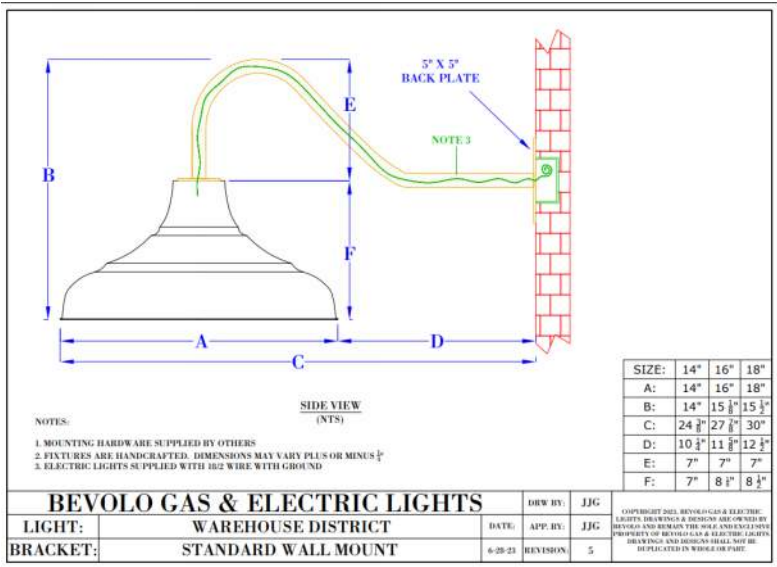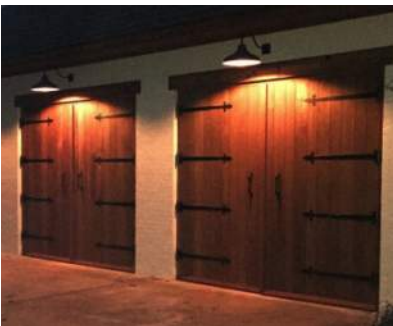

EXTERIOR LIGHTING




STAINED CEDAR CLAPBOARD SIDING



STANDING SEAM LEAD COATED COPPER ROOF



GRANITE BASE

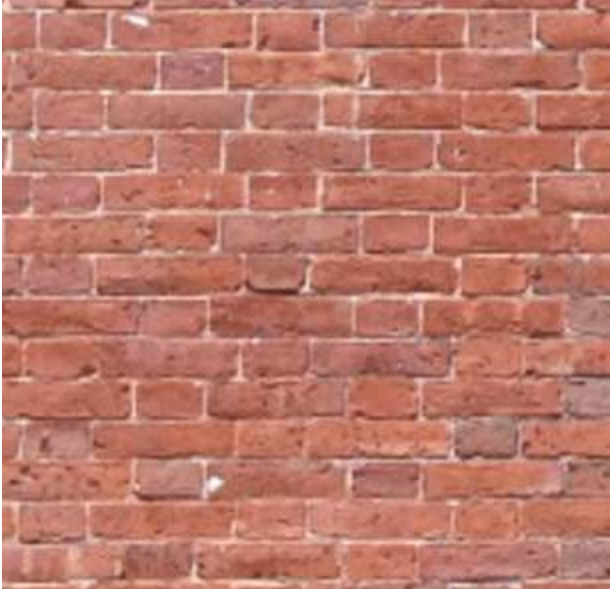

BRICK

# MATERIALITY



Classic  
SLATE

| Colors

Beautiful textured surfaces and edges that impart a controlled uniformity that epitomizes natural slate roofing enhance the natural color pallet of our Classic Slate.

ASH GREY | 5205 (731)



A\* CRRC: 0942-0207/Ref: .40/Emi: .93/SRI: 46  
C\* CRRC: 0942-0201/Ref: .38/Emi: .91/SRI: 43

GRANITE | 1170 (732)




A\* CRRC: 0942-0208/Ref: .36/Emi: .93/SRI: 41  
C\* CRRC: 0942-0202/Ref: .34/Emi: .89/SRI: 37

GRAPHITE | 1160 (733)



A\* CRRC: 0942-0209/Ref: .35/Emi: .92/SRI: 39  
C\* CRRC: 0942-0203/Ref: .31/Emi: .90/SRI: 33

SAGE GREEN | 2260 (815)



OLIVE | 2270 (814)



EVERGREEN | 2280 (730)




A\* CRRC: 0942-0206/Ref: .36/Emi: .92/SRI: 41  
C\* CRRC: 0942-0200/Ref: .32/Emi: .89/SRI: 34


MIST GREY | 5235 (803)



STEEL GREY | 1150 (804)



CHARCOAL BLACK | 1180 (801)



\*See details on page 11

CLASSIC SLATE | Single Width

| Class A: Item #4IFZE****<br>Class C: Item #4IFUE**** | Exposure                                           | Width | Height |         | Piece    | Bundle  | Square   | Pallet     | Truck       |
|------------------------------------------------------|----------------------------------------------------|-------|--------|---------|----------|---------|----------|------------|-------------|
|                                                      | Max: 7-1/2"<br>Can be installed<br>at 6" to 7-1/2" | 12"   | 18"    | Weight  | 1.5 lbs. | 38 lbs. | 240 lbs. | 2,400 lbs. | 42,500 lbs. |
|                                                      |                                                    |       |        | Pieces  | 1        | 25      | 160      | 1,600      | 28,000      |
|                                                      |                                                    |       |        | Bundles | —        | —       | 6.4      | 64         | 1,120       |
|                                                      |                                                    |       |        | Squares | —        | —       | —        | 10         | 175         |
|                                                      |                                                    |       |        | Pallets | —        | —       | —        | —          | 18          |

CLASSIC SLATE - STARTER

| Class A - Item #4IKZE****A<br>Class C - Item #4IKUE****A | Width               | Height  | Weight /<br>Piece   | Weight /<br>Bundle | Pieces /<br>Bundle |
|----------------------------------------------------------|---------------------|---------|---------------------|--------------------|--------------------|
|                                                          | 12"                 | 13-1/2" | 1 lbs.              | 25 lbs             | 25                 |
|                                                          | Pieces / Liner Foot |         | Liner Feet / Bundle |                    |                    |
|                                                          | 1                   |         | 25                  |                    |                    |

CLASSIC SLATE - HIP AND RIDGE

| Class A - Item #4INZE****A<br>Class C - Item #4INUE****A | Width             | Length             | Exposure           | Preformed Pitch        |                        |
|----------------------------------------------------------|-------------------|--------------------|--------------------|------------------------|------------------------|
|                                                          | 12"               | 18"                | 6"-7.5"            | 3/12 - 18/12           |                        |
|                                                          | Weight /<br>Piece | Weight /<br>Bundle | Pieces /<br>Bundle | Pieces /<br>Liner Foot | Liner Feet /<br>Bundle |
|                                                          | 1.5 lbs.          | 38 lbs.            | 25                 | 1.6                    | 15.6                   |

| TEST                                                                                                                                    | TESTING PERFORMED                                           | RESULTS FOR                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Fire Rating                                                                                                                             | In accordance with UL790 / ASTM E108                        | Class A* or Class C Fire Rated System. (Depending on system)                                    |
| Hail Rating                                                                                                                             | In accordance with UL2218                                   | Class 4                                                                                         |
| Accelerated Ultra Violet Exposure                                                                                                       | In accordance with ASTM G154 Xenon Arc Chamber 9,500+ hours | Tile exhibited virtually no fade and with no trace of cracking, spalling or deformation.        |
| Wind Driven Rain / Wind Uplift                                                                                                          | In accordance TAS 100-95; UL 580                            | Up to 110 mph. No water infiltration through sheathing. No tiles blew off, tore or blew upward. |
| Freeze-Thaw Cycle                                                                                                                       | In accordance with ASTM C666/C666M                          | No signs of damage or cracking after 300+ cycles.                                               |
| Water Absorption                                                                                                                        | In accordance with ASTM C272                                | No appreciable weight gain.                                                                     |
| Water Permeation                                                                                                                        | In accordance with ASTM E96/E96M                            | Tile shown to be impermeable per ASTM test methods.                                             |
| Approvals: Florida Building Code Org. FL#7409, FL#16269, FL#16856; Texas Department of Insurance RC-404; CCRR-0188, Miami-Dade Approved |                                                             |                                                                                                 |

SYNTHETIC SLATE SHINGLES

5/04/22 APPROVED HDC PACKAGE



## CITY OF PORTSMOUTH

Planning Department  
1 Junkins Avenue  
Portsmouth, New  
Hampshire 03801  
(603) 610-7216

### HISTORIC DISTRICT COMMISSION

May 17, 2022

129 State Street, LLC  
129 State Street  
Portsmouth, NH 03801

RE: Certificate of Approval for Property Located at 129 State Street (LU-22-78)

Dear Owner:

The Historic District Commission, at its regularly scheduled meeting of **Wednesday, May 04, 2022**, considered your application for renovations and new construction to an existing structure (removal of shutters, addition of dormers, and roofing and siding changes) as per plans on file in the Planning Department. Said property is shown on Assessor Map 107, Lot 47 and lies within the Character District 4 (CD4) and Historic Districts. As a result of said consideration, the Commission voted to **grant** the Certificate of Approval with the following stipulations:

1. There shall be no limestone addition to the window or door headers.
2. The details and cut sheets for the new doors, the garage doors, the slate roof seam with the abutters roof, and the oculus shall come back to the Commission for review as an Administrative Approval.
3. If necessary due to zoning setback requirements, the rear yard setback shall be adjusted to be in compliance and resubmitted for an Administrative Approval.
4. Half-screens shall be used.
5. The co-mingling of the deck and roof between 121 and 129 State Sheafe Streets shall be addressed by the applicant and memorialized in a formal agreement. A copy of which shall be provided to the Planning Department.
6. The current decorative window headers shall be removed and the original brick openings shall remain as they are.

#### Findings of Fact

##### A. Purpose and Intent

The proposed application meets the following objective(s) of the Historic District (as provided in Section 10.631.20 of the Zoning Ordinance):

-Conservation and enhancement of property values.

#### B. Review Criteria

The proposed application also meets the following review criteria of the Historic District (as provided in Section 10.635.70 of the Zoning Ordinance):

-Relation to historic and architectural value of existing properties.

The Commission's decision may be appealed up to thirty (30) days after the vote. Any action taken by the applicant pursuant to the Commission's decision during this appeal period shall be at the applicant's risk. Please contact the Planning Department for more details about the appeals process.

Approvals may also be required from other City Committees or Boards. Once all required approvals have been received, applicant is responsible for applying for and securing a building permit from the Inspection Department prior to starting any project work.

This approval shall expire unless a building permit is issued within a period of one (1) year from the date granted by the Historic District Commission unless an extension is granted by the Commission in accordance with Section 10.636.70 of the Zoning Ordinance.

*Please note that any changes or modifications to this application require review and approval from the Commission prior to implementation and additional fees may apply.*

The minutes and audio recording of this meeting are available by contacting the Planning Department.

Very truly yours,

Nicholas J. Cracknell, AICP, Principal Planner  
for Jonathan Wyckoff, Chairman of the Historic District Commission

cc: Shanti Wolph, Chief Building Inspector  
Rosann Maurice-Lentz, City Assessor

Shayne Forsley, Hampshire Development Corporation

HAMPSHIRE  
DEVELOPMENT  
CORPORATION  
General Contractor

**ATTN: Historic District  
Commission**

**RE: May 4, 2022 Meeting  
129 State Street  
Portsmouth, NH 03801**

**129 State Street  
Doyle Residence – Bill Doyle & Stephanie Nam**

**CONTACT:  
Shayne Forsley  
Hampshire Development Corp.  
[Shayne.forsley@hdcgc.net](mailto:Shayne.forsley@hdcgc.net)  
603.997.2519**

April 21, 2022

City of Portsmouth  
Planning Department  
1 Junkins Avenue  
Portsmouth, NH 03801

Attention: Historic District Commission  
RE: 129 State Street (LUHD-414)

The applicant and homeowners of 129 State Street, Bill & Stephanie Doyle requests to modify the façade to their property and add dormers for their use. The proposed design includes:

- Removal of the decorative window dressings
- Replacement of the non-historic windows & addition/reconfiguration of windows facing Sheafe Street
- Addition of limestone sills & headers on original masonry structure
- Addition of (2) skylights on State Street & shed dormer facing Sheafe Street
- Addition of oculus on main ridge of roof, and skylights on addition hip roof
- Addition of hip roof to rear portion of the modern structure
- New pediment option at main entry
- Replacement of asphalt shingle roof with synthetic slate
- Reconfiguration of garage entry & civilian entry at the rear of the modern addition on Sheafe Street
- Replacement of existing siding to modern addition with period appropriate clapboard or composite siding
- Addition of exterior lights above the garage doors and balcony facades
- General clean up of masonry & exterior trim to restore the structure back to its original form

The proposed architectural design is included in the package for your review and comment. We look forward to meeting with you for a work session for this project.

Sincerely,

Shayne Forsley  
General Manager

Cc: Bill Doyle & Stephanie Nam - Owners  
129 State Street  
Portsmouth, NH 03801

*41 Industrial Drive, Suite 20 Exeter, NH 03833 Tel: 603-778-9999 Fax: 603-778-2877*

AUGUST 5, 2026

HDC CONFORMED PLANS 5.4.22 APPROVAL



## HDC CONFORMED PLANS 5.4.22 APPROVAL



HDC CONFORMED PLANS 5.4.22 APPROVAL



④ Courtyard View 1



③ Sheafe St View 3



② Sheafe St View 2



① Sheafe St View 1



9 Amelia Drive, Portsmouth, NH 02874 | 603-228-8600 | www.chipwebster.com

Doyle  
Townhouse  
129 State St - Portsmouth, NH

SD - Not For Construction

| # | Date       | Note               |
|---|------------|--------------------|
| 3 | 2022.05.14 | HDC Work Session   |
| 4 | 2022.05.16 | HDC Work Session 2 |
| 5 | 2022.05.16 | HDC                |

3D1

THIS DESIGN AND DRAWINGS ARE COPYRIGHTED BY CHIP WEBSTER ARCHITECTURE AND ARE NOT TO BE REPRODUCED OR USED IN ANY WAY WITHOUT EXPRESS WRITTEN CONSENT FROM CHIP WEBSTER ARCHITECTURE


**Floor 1**  
 1/4" = 1'-0"

**Basement**  
 1/4" = 1'-0"


[illegible]

## A1.1

HDC CONFORMED PLANS 5.4.22 APPROVAL

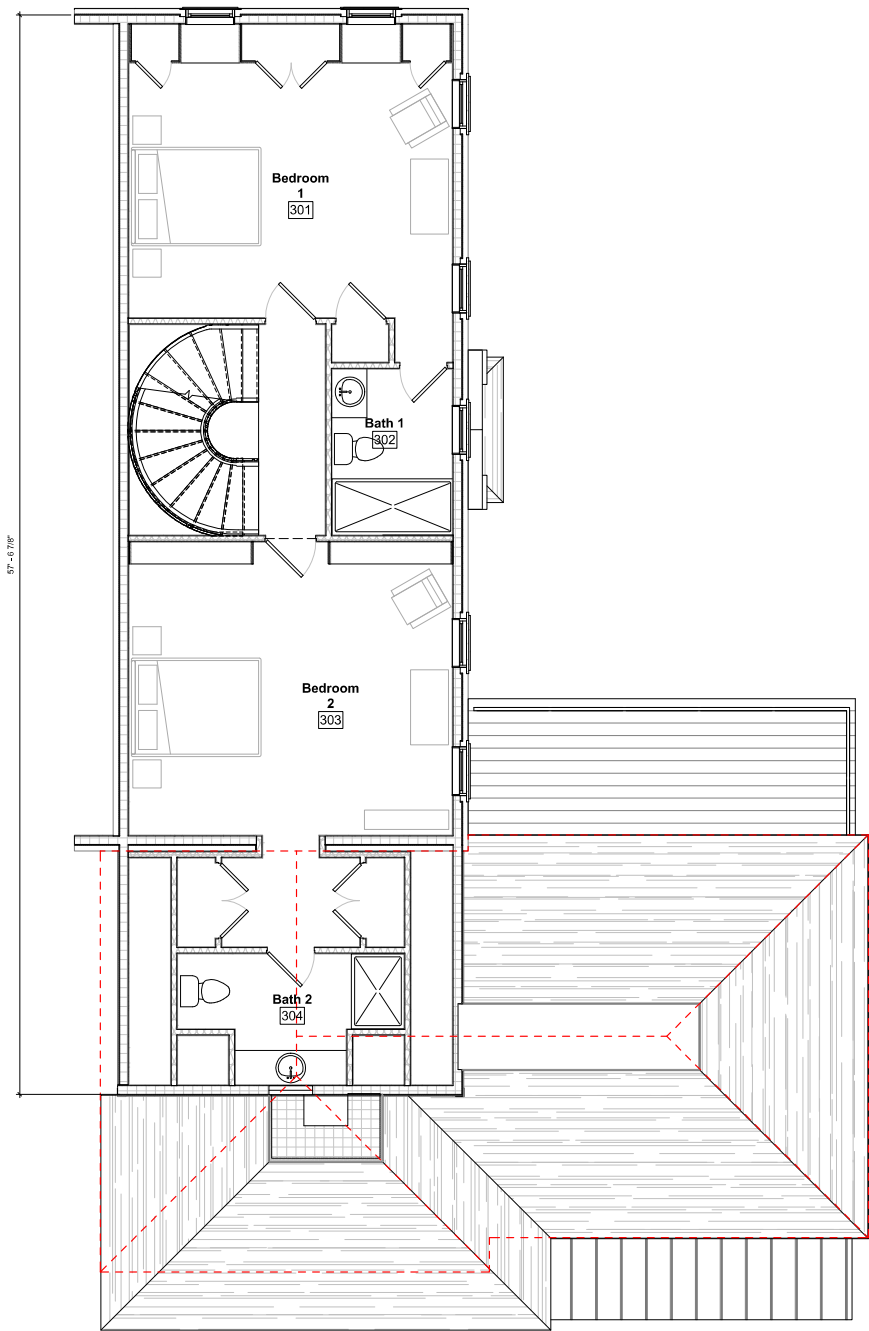

② Floor 3  
1/4" = 1'-0"

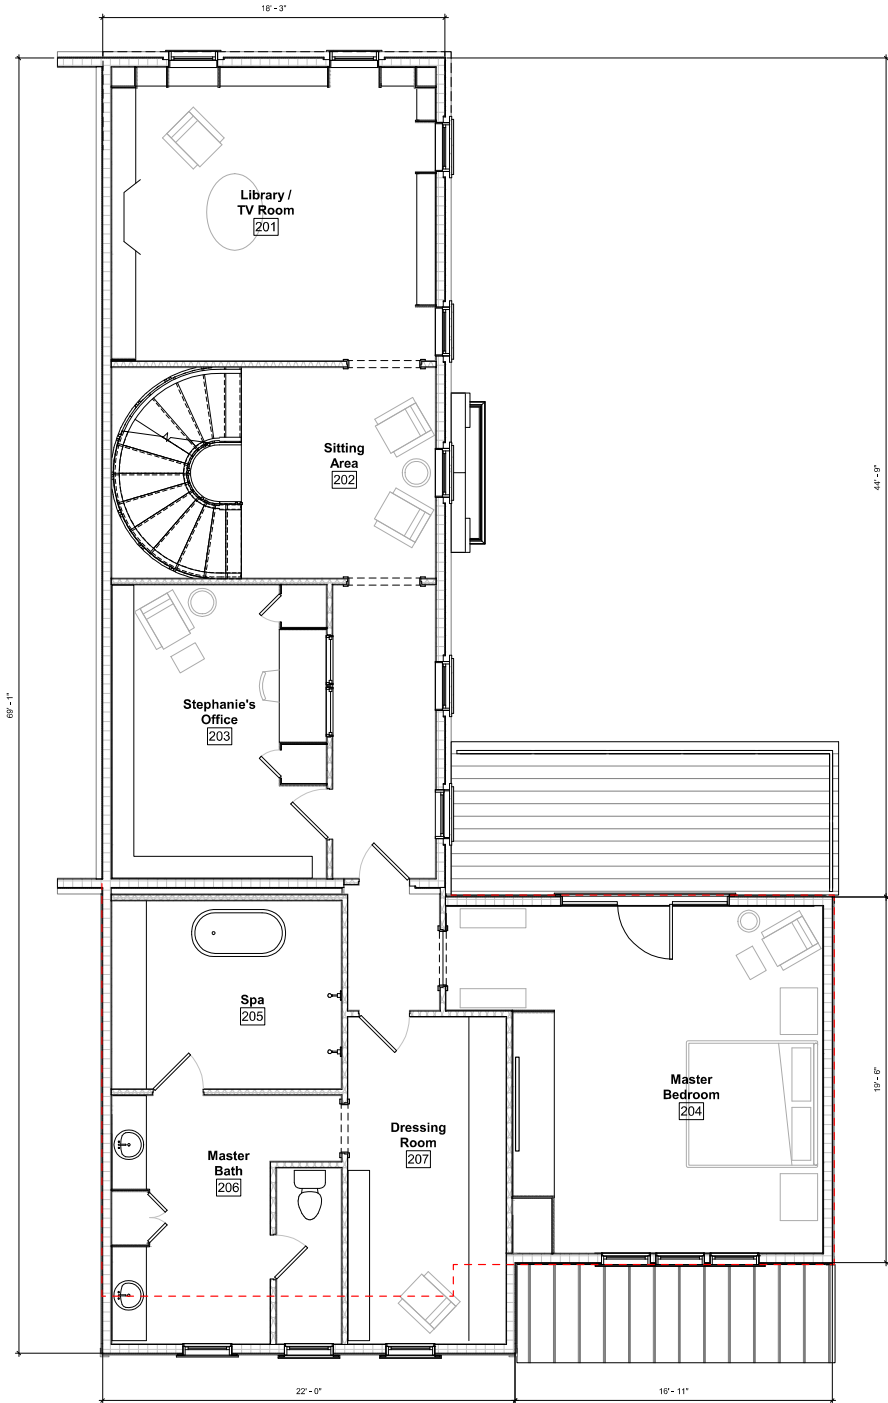

① Floor 2  
1/4" = 1'-0"



Doyle  
Townhouse  
129 State St - Portsmouth, NH



SD - Not For Construction

| # | Date       | Note               |
|---|------------|--------------------|
| 3 | 2022.01.14 | HDC Work Session   |
| 4 | 2022.03.16 | HDC Work Session 2 |
| 5 | 2022.03.16 | HDC                |
| 6 | 2022.04.22 | HDC                |

A1.2


THIS DESIGN AND DRAWINGS ARE COPYRIGHTED BY CHIP WEBSTER ARCHITECTURE AND ARE NOT TO BE REPRODUCED OR USED IN ANY WAY WITHOUT EXPRESS WRITTEN CONSENT FROM CHIP WEBSTER ARCHITECTURE

**CHIP WEBSTER**  
ARCHITECTURE  
9 Amalia Drive Nantucket MA 02554 | 508-228-3600 | [www.chipwebster.com](http://www.chipwebster.com)

[illegible]

AUGUST 5, 2026


HDC CONFORMED PLANS 5.4.22 APPROVAL

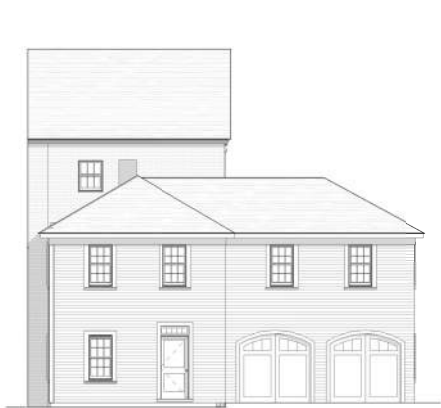

④ North - Existing  
1/8" = 1'-0"



① South - Existing  
1/8" = 1'-0"

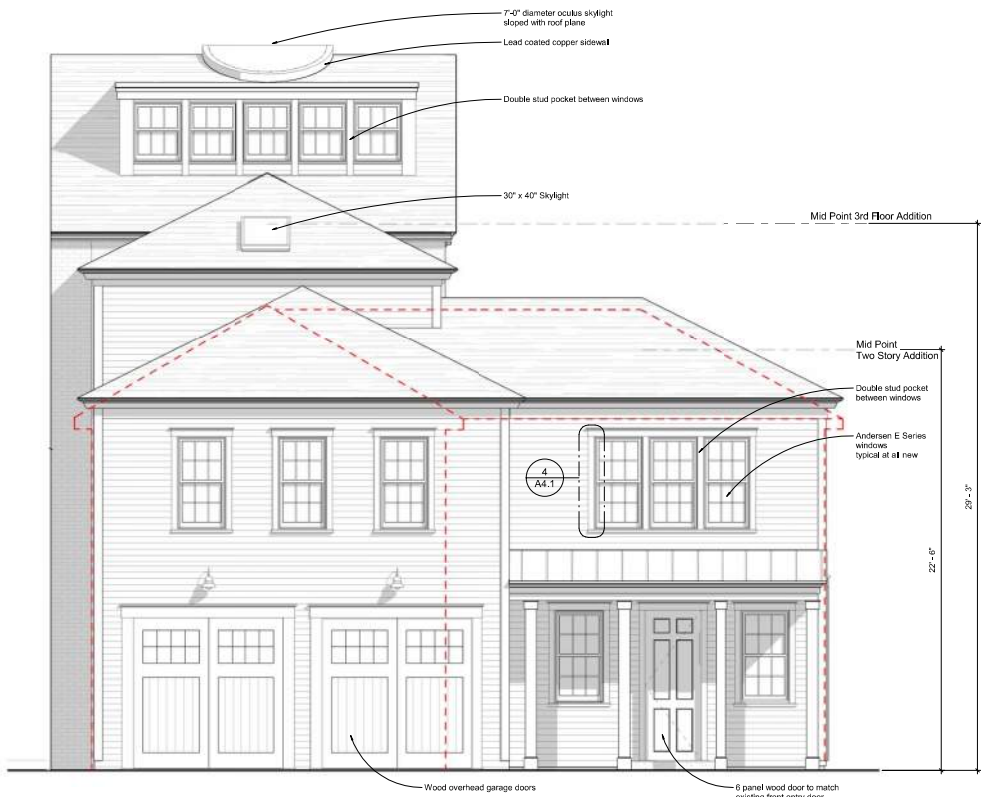




③ North - Proposed  
1/4" = 1'-0"



② South - Proposed  
1/4" = 1'-0"

| # | Date       | Note               |
|---|------------|--------------------|
| 1 | 2022.11.14 | HDC Work Session   |
| 2 | 2022.12.18 | HDC Work Session 2 |
| 3 | 2023.01.18 | HDC                |
| 4 | 2023.04.22 | HDC                |

**CHIP WEBSTER**  
ARCHITECTURE  
9 Andria Drive Nantuxet MA 02554 | 509-228-3600 | [www.chipwebster.com](http://www.chipwebster.com)





[illegible]

## A2.2

—THIS DESIGN AND DRAWINGS ARE COPYRIGHTED BY CHIP WEBSTER ARCHITECTURE AND ARE NOT TO BE REPRODUCED OR USED IN ANY WAY WITHOUT EXPRESS WRITTEN CONSENT FROM CHIP WEBSTER ARCHITECTURE—

**CHIP WEBSTER**  
ARCHITECTURE

9 Amelia Drive Nantucket MA 02554 | 508-229-3500 | [www.chipwebster.com](http://www.chipwebster.com)

[illegible]

### A4.1

—THIS DESIGN AND DRAWINGS ARE COPYRIGHTED BY CHIP WEBSTER ARCHITECTURE AND ARE NOT TO BE REPRODUCED OR USED IN ANY WAY WITHOUT EXPRESS WRITTEN CONSENT FROM CHIP WEBSTER ARCHITECTURE.


HDC CONFORMED PLANS 5.4.22 APPROVAL

HDC CONFORMED PLANS 5.4.22 APPROVAL  
Stone banding reference for proposed sills & heads

**Material  
Specifications & Cut  
Sheets**



Limestone banding on  
State Street facade  
(EXISTING)

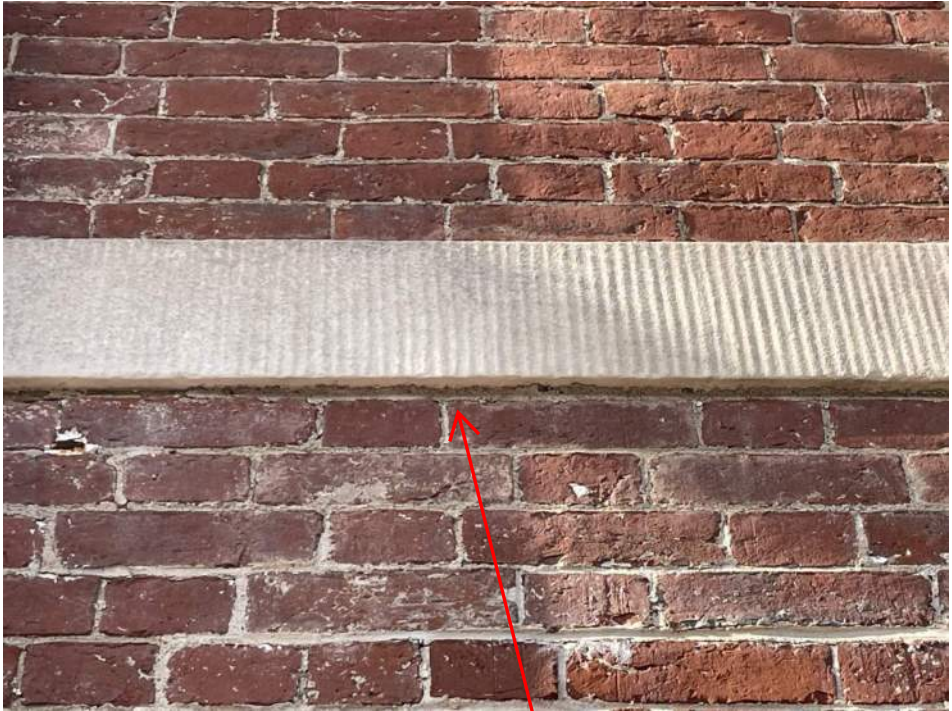

Limestone banding  
close-up (EXISTING)

HDC CONFORMED PLANS 5.4.22 APPROVAL

Classic Slate | Color Slate Shingles



The printed colors shown in this brochure may vary from actual available tile colors. Always use actual product samples for color selection.

HDC CONFORMED PLANS 5.4.22 APPROVAL

Specifications

| CLASSIC SLATE   Single Width                           |                                                 |       |        |         |          |         |          |            |             |
|--------------------------------------------------------|-------------------------------------------------|-------|--------|---------|----------|---------|----------|------------|-------------|
| Class A - Item #4IFZE****<br>Class C - Item #4IFUE**** | Exposure                                        | Width | Height |         | Piece    | Bundle  | Square   | Pallet     | Truck       |
|                                                        | Max: 7-1/2"<br>Can be installed at 6" to 7-1/2" | 12"   | 18"    | Weight  | 1.5 lbs. | 38 lbs. | 240 lbs. | 2,400 lbs. | 42,500 lbs. |
|                                                        |                                                 |       |        | Pieces  | 1        | 25      | 160      | 1,600      | 28,000      |
|                                                        |                                                 |       |        | Bundles | —        | —       | 6.4      | 64         | 1,120       |
|                                                        |                                                 |       |        | Squares | —        | —       | —        | 10         | 175         |
|                                                        |                                                 |       |        | Pallets | —        | —       | —        | —          | 18          |

| CLASSIC SLATE - STARTER                                                              |                     |         |                     |                 |                 | CLASSIC SLATE - HIP AND RIDGE                                                         |                |                 |                 |                     |                     |
|--------------------------------------------------------------------------------------|---------------------|---------|---------------------|-----------------|-----------------|---------------------------------------------------------------------------------------|----------------|-----------------|-----------------|---------------------|---------------------|
| Class A - Item #4IKZE****A<br>Class C - Item #4IKUE****A                             | Width               | Height  | Weight / Piece      | Weight / Bundle | Pieces / Bundle | Class A - Item #4INZE****A<br>Class C - Item #4INUE****A                              | Width          | Length          | Exposure        | Preformed Pitch     |                     |
|  | 12"                 | 13-1/2" | 1 lbs.              | 25 lbs          | 25              |  | 12"            | 18"             | 6"-7.5"         | 3/12 - 18/12        |                     |
|                                                                                      | Pieces / Liner Foot |         | Liner Feet / Bundle |                 |                 |                                                                                       | Weight / Piece | Weight / Bundle | Pieces / Bundle | Pieces / Liner Foot | Liner Feet / Bundle |
|                                                                                      | 1                   |         | 25                  |                 |                 |                                                                                       | 1.5 lbs.       | 38 lbs.         | 25              | 1.6                 | 15.6                |

| TEST                                                                                                               | TESTING PERFORMED                                           | RESULTS FOR                                                                                     |
|--------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Fire Rating                                                                                                        | In accordance with UL790 / ASTM E108                        | Class A* or Class C Fire Rated System. (Depending on system)                                    |
| Hail Rating                                                                                                        | In accordance with UL2218                                   | Class 4                                                                                         |
| Accelerated Ultra Violet Exposure                                                                                  | In accordance with ASTM G154 Xenon Arc Chamber 9,500+ hours | Tile exhibited virtually no fade and with no trace of cracking, spalling or deformation.        |
| Wind Driven Rain / Wind Uplift                                                                                     | In accordance TAS 100-95; UL 580                            | Up to 110 mph. No water infiltration through sheathing. No tiles blew off, tore or blew upward. |
| Freeze-Thaw Cycle                                                                                                  | In accordance with ASTM C666/C666M                          | No signs of damage or cracking after 300+ cycles.                                               |
| Water Absorption                                                                                                   | In accordance with ASTM C272                                | No appreciable weight gain.                                                                     |
| Water Permeation                                                                                                   | In accordance with ASTM E96/E96M                            | Tile shown to be impermeable per ASTM test methods.                                             |
| Approvals: Florida Building Code Org. FL#7409, FL#16269, FL#16856; Texas Department of Insurance RC-404; CCRR-0188 |                                                             |                                                                                                 |

Please refer to our website for installation guides.

\*Contact Inspire Roofing Products for specific application requirements for UL Class A Fire rated systems.

\*\*\*\* Indicates color number.

Cover: Classic | Granite



HDC CONFORMED PLANS 5.4.22 APPROVAL



SKU: 41FUE5235

Classic Slate - Mist Grey

[www.BoralRoof.com](http://www.BoralRoof.com)



HDC CONFORMED PLANS 5.4.22 APPROVAL



SKU: 41FUE1150

Classic Slate - Steel Grey

[www.BoralRoof.com](http://www.BoralRoof.com)

HDC CONFORMED PLANS 5.4.22 APPROVAL

Lead Coated Copper -  
Dark Patina Finish





DOUBLE-HUNG WINDOW  
HDC CONFORMED PLANS 5.4.22 APPROVAL

FEATURES

DOUBLE-HUNG WINDOWS

FRAME & SASH


**A** Select wood components are kiln dried and treated with water/insect repellent and preservative. Interior wood surfaces are available in pine, mixed grain Douglas fir, cherry, hickory, mahogany, maple, oak, walnut, alder or vertical grain Douglas fir. Interior surfaces are available unfinished or factory primed. Factory-applied finishes are available in a variety of stain and paint options.

**B** Wood components are fitted with aluminum extrusions on the exterior. 50 exterior colors that meet AAMA 2604 and 2605 specifications are available, as well as custom colors. Also available is a selection of seven exterior anodized options.


Optional vinyl installation flanges are pre-applied into a kerf on the frame exterior to facilitate installation. Optional aluminum flanges or metal installation clips are available.

**C** Compression bulb weatherstrip is applied on the bottom sash, head jamb, at the meeting rail and on side jambs for a maximum weather seal.

Jamb liners encase balancer assemblies that allow each sash to be tilted 90° inward from a bottom pivot and stay securely in place for washing.

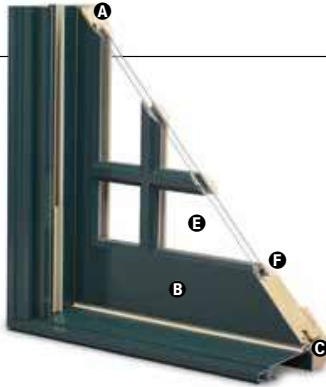

**D** Double-hung jamb liners incorporate synthetic interior and exterior inserts or optional painted aluminum exterior and wood-veneered interior inserts.



GLASS

**E** High-Performance Low-E4® glass with a low-conductivity spacer. Triple-pane glass, tinted, clear dual-pane, high-altitude glass and other special glazing options are available.

**F** Glass is fixed in place from the interior with wood stops that can be removed for easy reglazing if necessary. Glass stops available in ovolo (colonial) and contemporary profiles.

HARDWARE

Sash lock/tilt mechanisms and keepers give a slim, more traditional design and allow opening and tilting of the window in one operation. Tilting the sash from the inside for cleaning is effortless.

Optional surface mount sash lifts allow for easy operation. Units less than 3' wide use one lift. Units 3' wide and greater use two lifts.

HARDWARE OPTIONS



Lock



Sash Lift

Antique Brass | **Black** | Bright Chrome | Bronze | Gold  
Oil Rubbed Bronze | Pewter | Polished Brass | Satin Chrome | White

Windows with VeriLock® sensors use a different sash lock. See the next page for details.

HARDWARE FINISHES




Oil rubbed bronze is a "living" finish that will change with time and use.

EXTERIOR & INTERIOR OPTIONS

**EXTERIOR COLORS** 50 exterior colors, 7 anodized finishes and custom colors. See exterior colors on page 11.

INTERIOR WOOD SPECIES

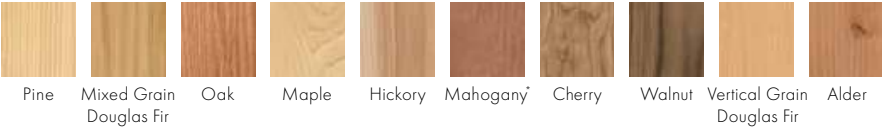


Naturally occurring variations in grain, color and texture of wood make each window one of a kind.

All factory-finished options are shown on pine.

Painted options available on pine. Dark bronze and black painted options available on pine or maple. Anodized silver painted option available on maple only.

Interior custom stains, paints and color matching available.

FACTORY-FINISHED INTERIORS

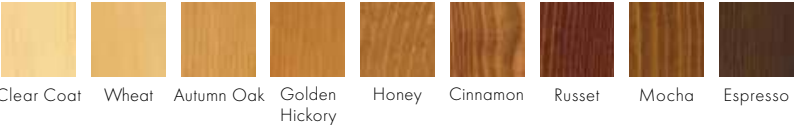

INTERIOR PAINTED OPTIONS



\*Actual wood species is either Sapele or Sipo, both non-endangered species grown in Africa, with color and characteristics similar to Central American mahoganies. Printing limitations prevent exact replication of colors and finishes. Please see your Andersen supplier for actual color and finish samples.



HDC CONFORMED PLANS 5.4.22 APPROVAL

E-SERIES

## ACCESSORIES Sold Separately

### DOUBLE-HUNG WINDOWS

#### HARDWARE

##### Window Opening Control Device Kit

An optional Window Opening Control Device Kit is available, which limits opening the sash to less than 4" when the window is first opened. Available in stone and white.

#### SENSORS

##### VeriLock® Security Sensors



VeriLock sensors are unique as they detect whether the windows are locked or unlocked\* — a feature no other sensors can provide. See page 27 for Smart Home options.

##### Open/Closed Sensors

Wireless open/closed sensors are available in four colors. See page 27 for details.

#### INSECT SCREENS

##### Conventional Insect Screens



Charcoal fiberglass screen mesh fits into an aluminum frame in all 50 exterior colors and seven anodized finishes. Available in half or full insect screens. Aluminum screen mesh is available as an option.

##### TruScene® Insect Screens


TruScene insect screens available in all 50 exterior colors and seven anodized finishes.

See page 24 for more information on our insect screen options.

#### GRILLES

##### Full Divided Light

Permanent interior and exterior grilles with grille spacer bars between two panes of glass. Available in  $\frac{5}{8}$ ",  $\frac{7}{8}$ ",  $1\frac{1}{8}$ ",  $1\frac{1}{2}$ ", or  $2\frac{1}{4}$ " widths. Interior grilles are available with ovolo or contemporary profile (ovolo profile shown below). Not all widths are shown.



##### Simulated Divided Light

Permanent exterior and interior grilles without grille spacer bars. Available in  $\frac{5}{8}$ ",  $\frac{7}{8}$ ",  $1\frac{1}{8}$ ",  $1\frac{1}{2}$ ", or  $2\frac{1}{4}$ " widths. Interior grilles are available with ovolo or contemporary profile (ovolo profile shown below). Not all widths are shown.



#### Finelight™

##### Grilles-Between-the-Glass

Available in  $\frac{5}{8}$ " flat or 1" contoured aluminum profiles. Two-tone colors of pebble tan/colony white, sierra bronze/colony white or forest green/colony white are available on the 1" profile.



$\frac{5}{8}$ " Flat 1" Contoured

##### Removable Interior Wood Grilles

Removable interior wood grilles are available in a  $\frac{7}{8}$ " width and ovolo or contemporary profiles. Optional surround for removable grille and permanent exterior grilles also available.




See page 22 for more information on grilles.

E-Series Double-Hung Windows

## DOUBLE-HUNG WINDOWS

HDC CONFORMED PLANS 5.4.22 APPROVAL

### Double-Hung Windows

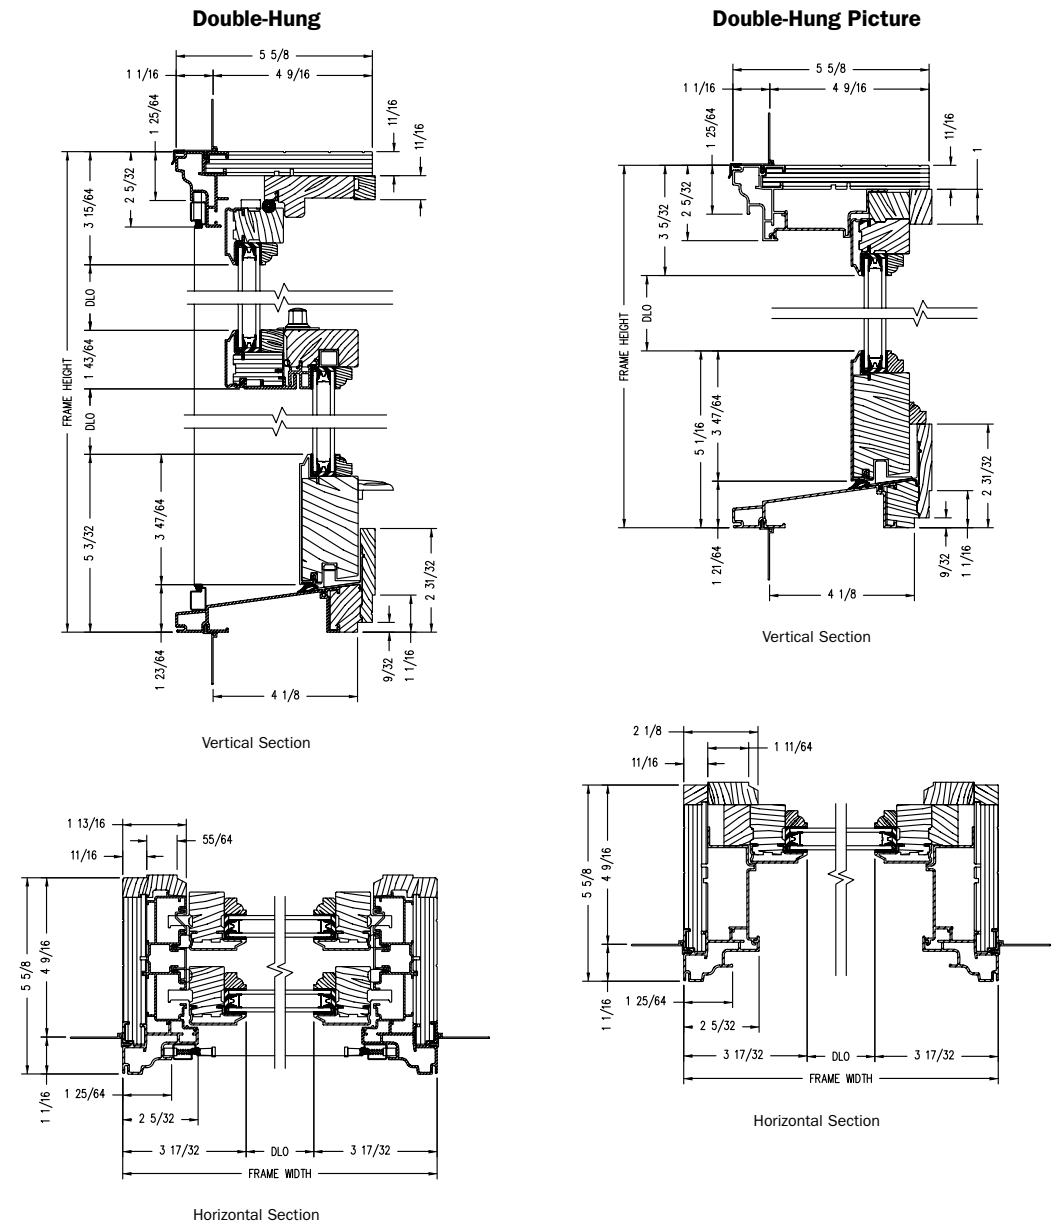

Shown with ovolo (colonial) glass stops.

PROPER INSTALLATION AND MAINTENANCE OF E-SERIES PRODUCTS IS ESSENTIAL TO ATTAIN OPTIMUM PERFORMANCE AND OPERATION. WRITTEN INSTALLATION INSTRUCTIONS THAT PROVIDE GUIDELINES FOR PROPER INSTALLATION ARE AVAILABLE BY VISITING [ANDERSENWINDOWS.COM](http://ANDERSENWINDOWS.COM). CUSTOM SIZES ARE AVAILABLE. CONTACT YOUR LOCAL SUPPLIER FOR MORE INFORMATION. DRAWINGS ARE NOT TO SCALE.

\*When properly configured and maintained with a professionally installed security system and/or self monitoring system compatible with Honeywell® 5800 controls. See your Andersen supplier for more information.

HDC CONFORMED PLANS 5.4.22 APPROVAL



## Skylight Specifications

# Fixed Skylight

Deck and Curb-Mounted



*Bringing light to life™*

Fixed Skylights

Deck-Mounted, Curb-Mounted

Deck-Mounted - FS  
Mounts directly to the roof deck



Curb-Mounted - FCM  
Mounts directly to a site-built curb



Benefits

- Pre-finished white wood frame and protective aluminum or copper cladding.
- Streamlined exterior profile does not obstruct your roofline.
- Streamlined exterior profile does not obstruct your roofline.
- Pre-mounted Pick&Click!™ system brackets make the installation of sunscreen blinds a snap.

| FS<br>Model<br>Size                                                                                                                                |  |  |                    |                    |                    |                    |                    |                     |                    |                    |                     |                     |                      |                    |                    |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|--------------------|--------------------|--------------------|--------------------|---------------------|--------------------|--------------------|---------------------|---------------------|----------------------|--------------------|--------------------|--|
|                                                                                                                                                    | 14° - 85°<br>3:12 - 137:12                                                          | A06                                                                                 | C01                | C04                | C06                | C08                | C12                | D26                 | D06                | M02                | M04                 | M06                 | M08                  | S01                | S06                |  |
| Rough<br>Opening                                                                                                                                   | (W-in. x<br>H-in.)                                                                  | 14 1/2 x<br>45 3/4                                                                  | 21 x<br>26 7/8     | 21 x<br>37 7/8     | 21 x<br>45 3/4     | 21 x<br>54 1/16    | 21 x<br>70 1/4     | 22 1/2 x<br>22 5/16 | 22 1/2 x<br>45 3/4 | 30 1/16<br>x 30    | 30 1/16<br>x 37 7/8 | 30 1/16<br>x 45 3/4 | 30 1/16<br>x 54 1/16 | 44 1/4 x<br>26 7/8 | 44 1/4 x<br>45 3/4 |  |
|  Model FS sizes D26 and D06 fit perfectly between roof trusses. |                                                                                     |                                                                                     |                    |                    |                    |                    |                    |                     |                    |                    |                     |                     |                      |                    |                    |  |
| FCM<br>Model<br>Size                                                                                                                               |  |  |                    |                    |                    |                    |                    |                     |                    |                    |                     |                     |                      |                    |                    |  |
|                                                                                                                                                    | 0° - 60°<br>0:12 - 20:12                                                            | 1430                                                                                | 1446               | 2222               | 2230               | 2234               | 2246               | 2270                | 3030               | 3046               | 3055                | 3434                | 3446                 | 4646               | 4672               |  |
| Outside Curb                                                                                                                                       | (W-in. x H-in.)                                                                     | 17 1/2 x<br>33 1/2                                                                  | 17 1/2 x<br>49 1/2 | 25 1/2 x<br>25 1/2 | 25 1/2 x<br>33 1/2 | 25 1/2 x<br>37 1/2 | 25 1/2 x<br>49 1/2 | 25 1/2 x<br>73 1/2  | 33 1/2 x<br>33 1/2 | 33 1/2 x<br>49 1/2 | 33 1/2 x<br>58 1/2  | 37 1/2 x<br>37 1/2  | 37 1/2 x<br>49 1/2   | 49 1/2 x<br>49 1/2 | 49 1/2 x<br>75 1/2 |  |
| Max. Skylight<br>Clearance                                                                                                                         | (W-in. x H-in.)                                                                     | 18 5/8 x<br>34 5/8                                                                  | 18 5/8 x<br>50 5/8 | 26 5/8 x<br>26 5/8 | 26 5/8 x<br>34 5/8 | 26 5/8 x<br>38 5/8 | 26 5/8 x<br>50 5/8 | 26 5/8 x<br>74 5/8  | 34 5/8 x<br>34 5/8 | 34 5/8 x<br>50 5/8 | 34 5/8 x<br>59 5/8  | 38 5/8 x<br>38 5/8  | 38 5/8 x<br>50 5/8   | 50 5/8 x<br>50 5/8 | 50 5/8 x<br>76 5/8 |  |

FCM custom sizes available

HDC CONFORMED PLANS 5.4.22 APPROVAL

The No Leak Skylight  
No Leak Promise  
No Worries



Safest Glass to Live Under

Clean, Quiet & Safe

When selecting a VELUX Fixed Skylight rest assured your skylight comes with our most-recommended, top-rated glass: Clean, Quiet & Safe. Named for its three biggest benefits, this glass comes with state-of-the-art, energy-conserving LowE glass, designed to keep your home warmer in the winter and cooler in the summer.

**Clean:** Skylights stay cleaner longer with Neat® glass coating.

**Quiet:** Reduces unwanted outside noise by up to 25% compared to a standard double pane glass and up to 50% compared to a plastic skylight.

**Safe:** Unlike tempered, this glass does not shatter into pieces when cracked.



ENERGY STAR certified products are the most straightforward way to help meet energy codes.

Most VELUX residential products are ENERGY STAR certified in all 50 states. By specifying or using ENERGY STAR certified products, architects and builders can use windows and skylights to bring much needed daylight and fresh air inside, creating more attractive buildings and livable spaces while still meeting the local energy codes.


3 Layers of Protection

The No Leak Skylight™  
• No Leak Promise • No Worries

- 1 Pre-attached Seal**  
Pre-attached deck seal (deck-mounted) or gasket (curb-mounted) provides a tight seal for leak-proof installation.
- 2 Adhesive Underlayment**  
Adhesive underlayment for secondary water protection against the harshest weather conditions.
- 3 Engineered Flashing**  
Engineered flashing for easy installation and primary water protection.




HDC CONFORMED PLANS 5.4.22 APPROVAL

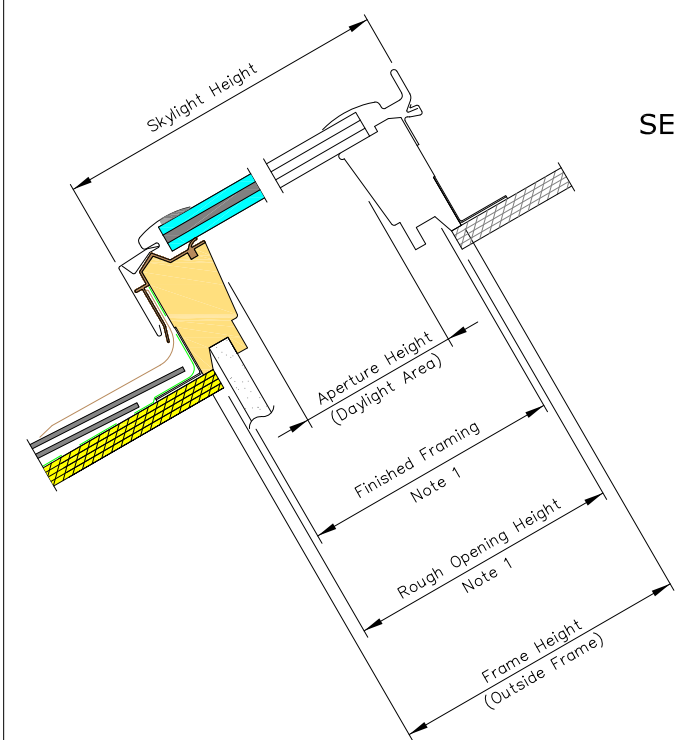


VERTICAL CROSS SECTION

SEE DETAIL 1

1

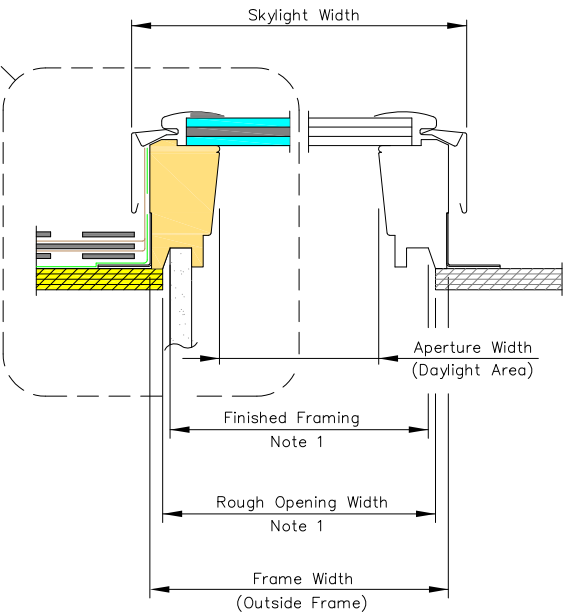

HORIZONTAL CROSS SECTION

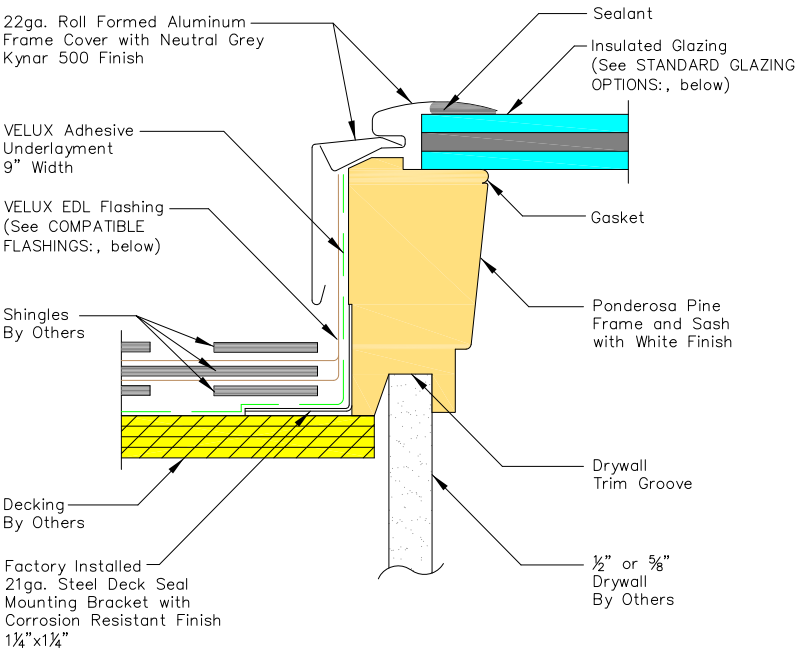

DETAIL

1

PRODUCT DIMENSIONS

| METRIC UNITS (MILLIMETERS) |                     |             |                      |                |                      |              |                       |                 |                            | IMPERIAL UNITS (INCHES) |                     |             |                      |                |                      |              |                |                 |                          |
|----------------------------|---------------------|-------------|----------------------|----------------|----------------------|--------------|-----------------------|-----------------|----------------------------|-------------------------|---------------------|-------------|----------------------|----------------|----------------------|--------------|----------------|-----------------|--------------------------|
| Size                       | Rough Opening Width | Frame Width | Frame Aperture Width | Skylight Width | Rough Opening Height | Frame Height | Frame Aperture Height | Skylight Height | Daylight Area (Sq. Meters) | Size                    | Rough Opening Width | Frame Width | Frame Aperture Width | Skylight Width | Rough Opening Height | Frame Height | Frame Aperture | Skylight Height | Daylight Area (Sq. Feet) |
| A06                        | 368                 | 387         | 303                  | 409            | 1162                 | 1175         | 1091                  | 1200            | .333                       | A06                     | 14 1/2              | 15 1/4      | 11 15/16             | 16 1/8         | 45 3/4               | 46 1/4       | 42 15/16       | 47 1/4          | 3.56                     |
| C01                        | 533                 | 546         | 462                  | 568            | 682                  | 695          | 611                   | 720             | .282                       | C01                     | 21                  | 21 1/2      | 18 3/16              | 22 3/8         | 26 7/8               | 27 3/8       | 24 1/16        | 28 3/8          | 3.04                     |
| C04                        | 533                 | 546         | 462                  | 568            | 962                  | 975          | 891                   | 1000            | .412                       | C04                     | 21                  | 21 1/2      | 18 3/16              | 22 3/8         | 37 7/8               | 38 3/8       | 35 1/16        | 39 3/8          | 4.43                     |
| C06                        | 533                 | 546         | 462                  | 568            | 1162                 | 1175         | 1091                  | 1200            | .504                       | C06                     | 21                  | 21 1/2      | 18 3/16              | 22 3/8         | 45 3/4               | 46 1/4       | 42 15/16       | 47 1/4          | 5.43                     |
| C08                        | 533                 | 546         | 462                  | 568            | 1382                 | 1395         | 1311                  | 1420            | .606                       | C08                     | 21                  | 21 1/2      | 18 3/16              | 22 3/8         | 54 7/16              | 54 15/16     | 51 5/8         | 55 15/16        | 6.52                     |
| C12                        | 533                 | 546         | 462                  | 568            | 1784                 | 1797         | 1713                  | 1822            | .792                       | C12                     | 21                  | 21 1/2      | 18 3/16              | 22 3/8         | 70 1/4               | 70 3/4       | 67 7/16        | 71 3/4          | 8.52                     |
| D26*                       | 572                 | 590         | 506                  | 612            | 582                  | 599          | 511                   | 620             | .259                       | D26*                    | 22 1/2              | 23 1/4      | 19 15/16             | 24 1/16        | 22 15/16             | 23 7/16      | 20 1/8         | 24 7/16         | 2.78                     |
| D06*                       | 572                 | 590         | 506                  | 612            | 1162                 | 1175         | 1091                  | 1200            | .552                       | D06*                    | 22 1/2              | 23 1/4      | 19 15/16             | 24 1/16        | 45 3/4               | 46 1/4       | 42 15/16       | 47 1/4          | 5.94                     |
| M02                        | 763                 | 776         | 692                  | 798            | 762                  | 775          | 691                   | 800             | .486                       | M02                     | 30 1/16             | 30 9/16     | 27 1/4               | 31 7/16        | 30                   | 30 1/2       | 27 3/16        | 31 1/2          | 5.15                     |
| M04                        | 763                 | 776         | 692                  | 798            | 962                  | 975          | 891                   | 1000            | .617                       | M04                     | 30 1/16             | 30 9/16     | 27 1/4               | 31 7/16        | 37 7/8               | 38 3/8       | 35 1/16        | 39 3/8          | 6.64                     |
| M06                        | 763                 | 776         | 692                  | 798            | 1162                 | 1175         | 1091                  | 1200            | .754                       | M06                     | 30 1/16             | 30 9/16     | 27 1/4               | 31 7/16        | 45 3/4               | 46 1/4       | 42 15/16       | 47 1/4          | 8.13                     |
| M08                        | 763                 | 776         | 692                  | 798            | 1382                 | 1395         | 1311                  | 1420            | .909                       | M08                     | 30 1/16             | 30 9/16     | 27 1/4               | 31 7/16        | 54 7/16              | 54 15/16     | 51 5/8         | 55 15/16        | 9.77                     |
| S01                        | 1123                | 1136        | 1052                 | 1158           | 682                  | 695          | 611                   | 720             | .644                       | S01                     | 44 1/4              | 44 3/4      | 41 7/16              | 45 9/16        | 26 7/8               | 27 3/8       | 24 1/16        | 28 3/8          | 6.92                     |
| S06                        | 1123                | 1136        | 1052                 | 1158           | 1162                 | 1175         | 1091                  | 1200            | 1.148                      | S06                     | 44 1/4              | 44 3/4      | 41 7/16              | 45 9/16        | 45 3/4               | 46 1/4       | 42 15/16       | 47 1/4          | 12.36                    |

\* BUILDER SERIES SKYLIGHT

NOTES:  
1. The ROUGH OPENING and FINISHED FRAMING dimensions are based on perpendicular interior finish material on all four sides and these dimensions will vary depending on the roof construction, the thickness and the design of the interior finish material.

- STANDARD GLAZING OPTIONS:
- Laminated LowE3 (04)
  - Tempered LowE3 (05)
  - Impact (06)
  - Snowload (10)
- \*Tempered Exterior Pane used with all options

- COMPATIBLE FLASHINGS:
- EDL Step flashing
  - EKL/EKX Combi flashing
  - EDW Tile flashing
  - EKW/EKX Combi tile flashing
  - EDM Metal roof flashing
  - ECB Counter flashing for curbs



VELUX  
1418 Evans Pond Road  
Greenwood, SC 29649  
1-800-88-VELUX  
www.VELUXUSA.com

FS - Fixed Skylight

This drawing is an instrument of service and is provided for informational use only.

© 2019 VELUX GROUP

® VELUX is a registered trademark


HDC CONFORMED PLANS 5.4.22 APPROVAL

Skylight Study



Perspective View from  
across State Street

Skylight Study

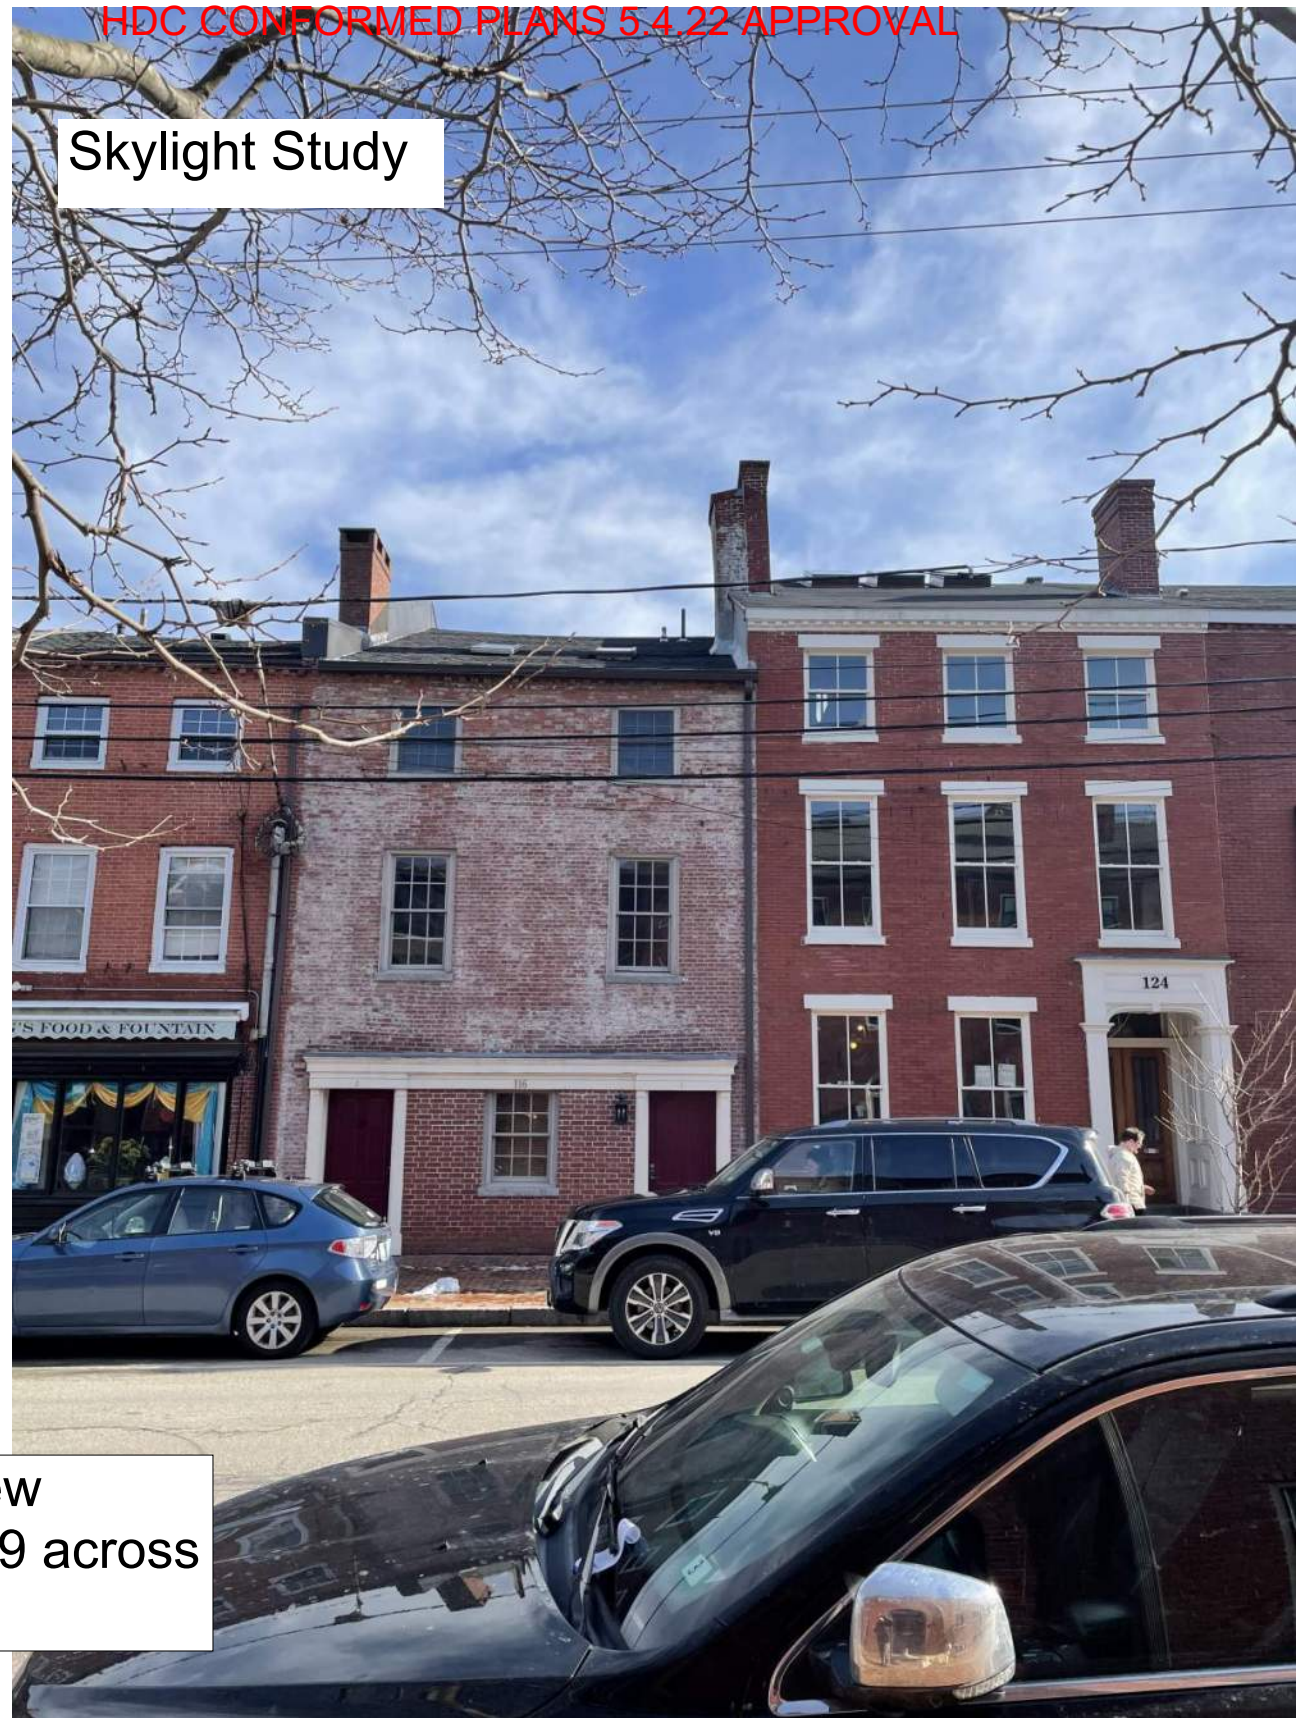

Perspective View  
looking from 129 across  
State Street