

RECEIVED

OCT 31 2019

**Elf's Landscaping, Inc for Liberty Mutual.**

**Land use application # LU-19-220**

BY: \_\_\_\_\_

**Project description:**

**Areas for 4, 7' x 7' patios will be dug down 12" in depth.**

**Then 4" – 5" of ¾" crushed stone is installed. Immobilization fabric is put on top of the stone.**

**¾" driveway pack is installed next. (6" – 8"), followed by 1" of masonry sand.**

**Materials will be compacted at 3" lifts**

**Pavers are then installed with Bric edge along edges.**

**Polymeric sand is then installed in grout lines.**

Area and patios (all levels)  
to be sod  
Access to be  
provided with  
(conservation)  
seed

4 Picnic tables  
7x7 paved

Planting  
4 trees

Buffer zone

Buffer zone



1 OVERALL SITE PLAN

CONSTRUCTION KEY

AREA OF WORK

⊗ TRUE NORTH  
⊕ PLAN NORTH

Patios installed  
to ICPI standards  
(attached)


3 islands Removal of grass/lawn

RECEIVED

OCT 30 2019

BY: \_\_\_\_\_

ASAP SITE PLAN BY: [unclear]

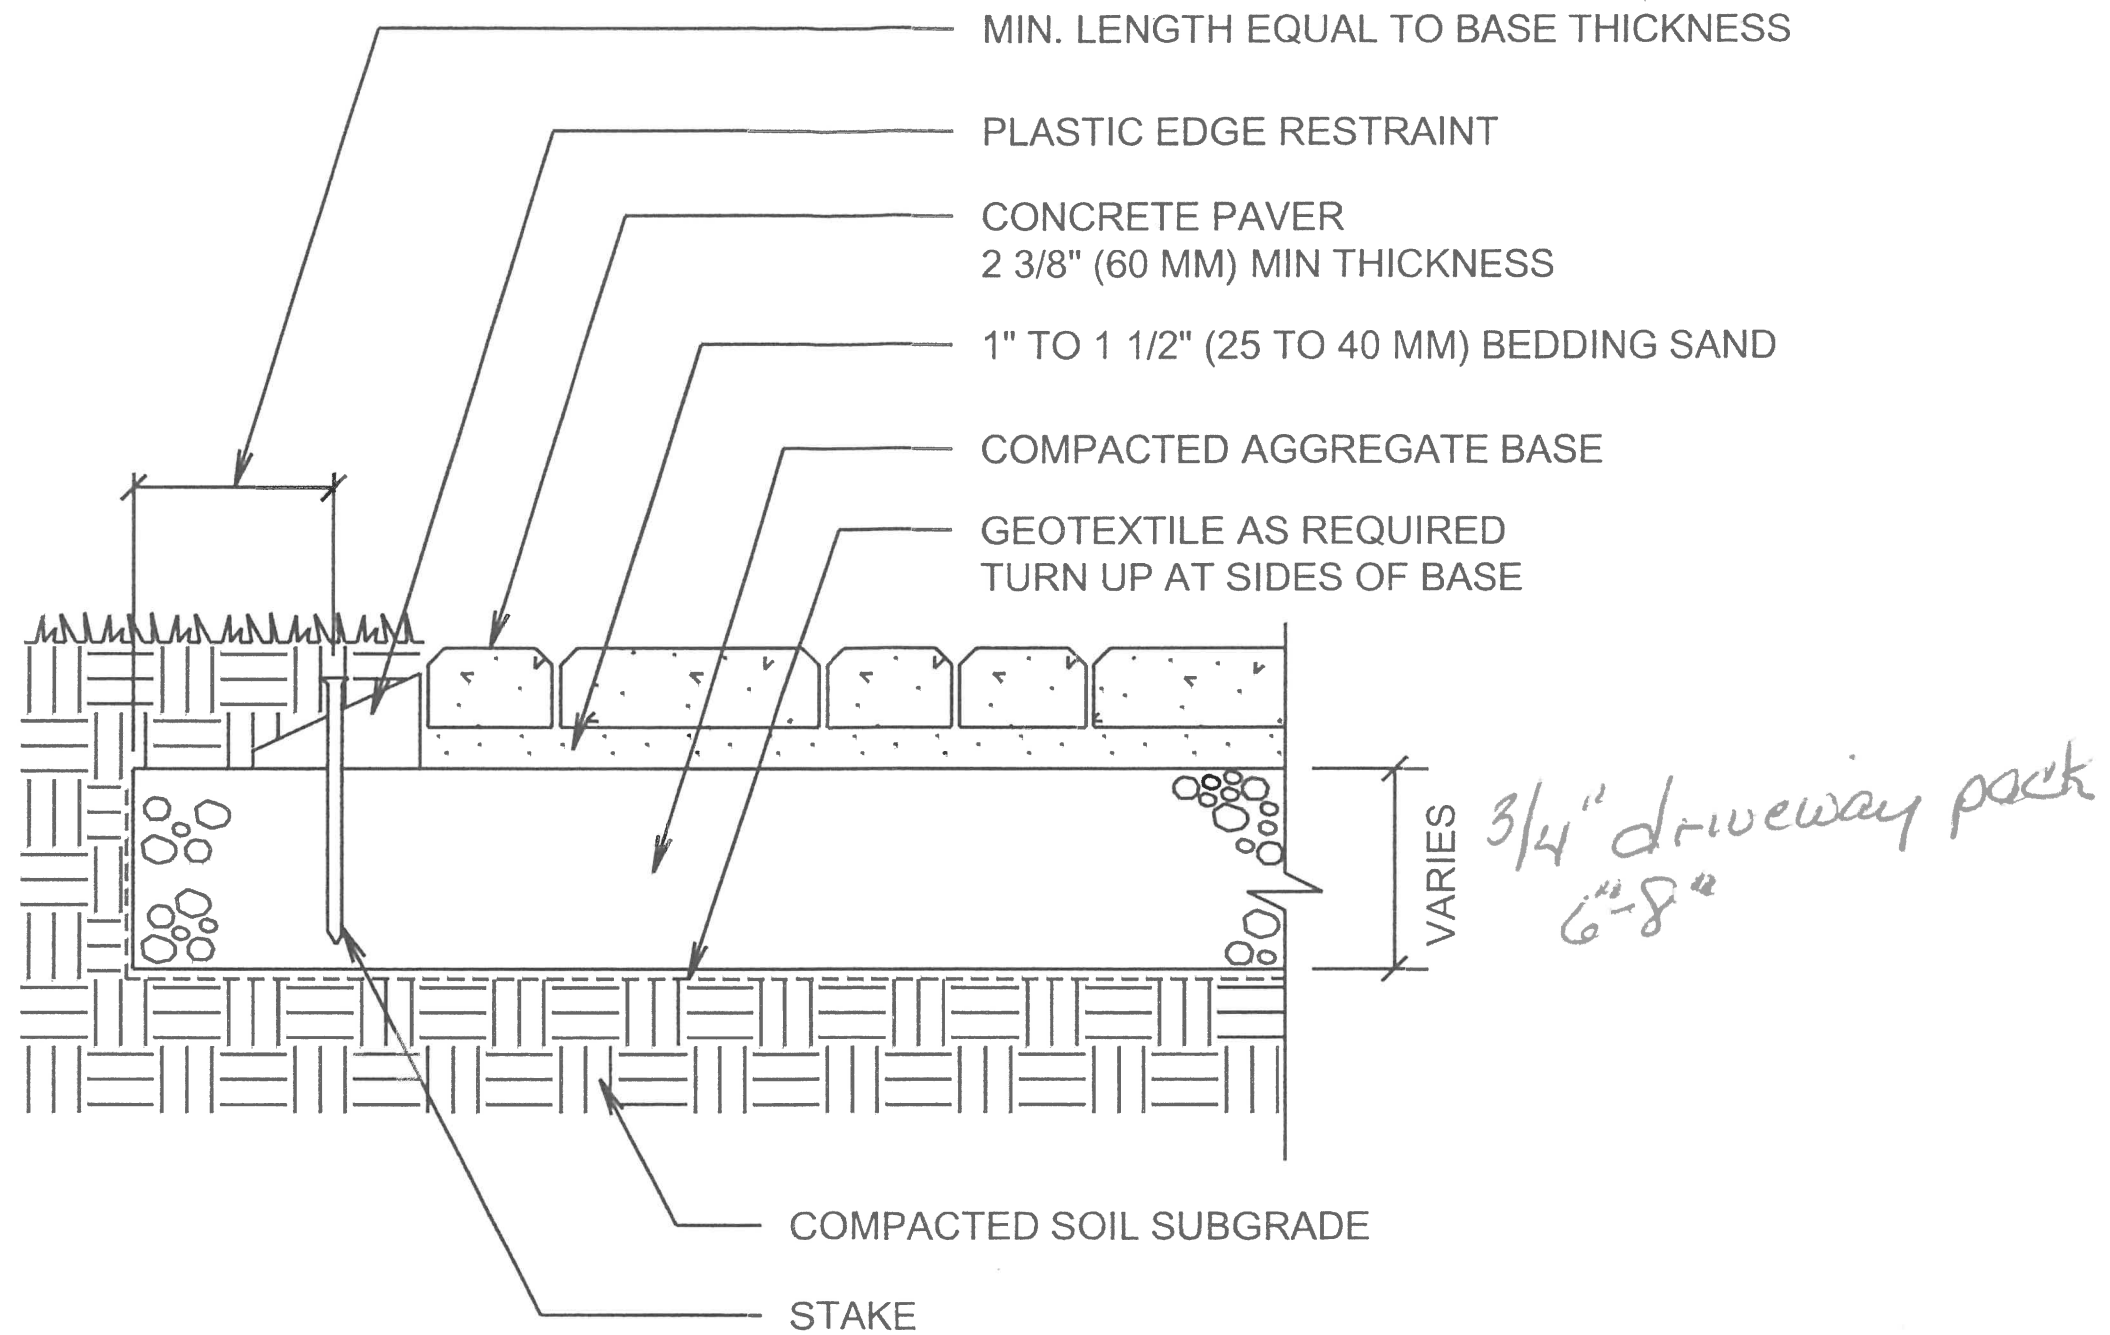

NOTE:

1. THICKNESS OF AGGREGATE BASE WILL VARY WITH SUBGRADE CONDITIONS AND CLIMATE.  
COLDER CLIMATES MAY REQUIRE THICKER BASES.

PATIO/ WALK/ RESIDENTIAL DRIVEWAY

WITH PLASTIC EDGE RESTRAINT

DRAWING NO.

ICPI-52

SCALE